

[MS-SSCLRT]: Microsoft SQL Server CLR Types Serialization Formats

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft's Open Specification Promise (available here: <http://www.microsoft.com/interop/osp>) or the Community Promise (available here: <http://www.microsoft.com/interop/cp/default.mspx>). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting iplq@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights.
- **Fictitious Names.** The example companies, organizations, products, domain names, e-mail addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
08/07/2009	0.1	Major	First release.
11/06/2009	0.1.1	Editorial	Revised and edited the technical content.
03/05/2010	0.2	Minor	Updated the technical content.

Contents

1 Introduction	4
1.1 Glossary	4
1.2 References	4
1.2.1 Normative References	4
1.2.2 Informative References	5
1.3 Structure Overview (Synopsis)	5
1.4 Relationship to Protocols and Other Structures	5
1.5 Applicability Statement	6
1.6 Versioning and Localization	6
1.7 Vendor-Extensible Fields	6
2 Structures	7
2.1 System CLR Types Structure	7
2.1.1 The GEOGRAPHY and GEOMETRY Structures	7
2.1.2 The Basic GEOGRAPHY Structure	7
2.1.3 The FIGURE Structure	10
2.1.4 The SHAPE Structure	10
2.1.5 The GEOGRAPHY POINT Structure	11
2.1.6 The GEOMETRY POINT Structure	12
2.2 The HIERARCHYID Structure	12
2.2.1 Logical Definition	12
2.2.2 Physical Representation	13
2.3 CLR UDTs	14
2.3.1 SQL Server Native UDT Serialization	14
2.3.1.1 Binary Format of Each Byte	15
2.3.1.2 Binary Format of Primitive Types	15
2.3.1.3 Nested Structures	17
2.3.2 User-Defined UDT Serialization	17
3 Structure Examples	18
3.1 GEOGRAPHY and GEOMETRY Structure Examples	18
3.1.1 Example of an Empty Point Structure	18
3.1.2 Example of a Geometry Point Structure	18
3.1.3 Example of a Linestring Structure	19
3.1.4 Example of a Geometry Collection Structure	20
3.2 HIERARCHYID Examples	23
3.3 CLR UDT Serialization Example	23
4 Security Considerations	26
5 Appendix A: Product Behavior	27
6 Change Tracking	28
7 Index	30

1 Introduction

This document specifies the binary format of the **GEOGRAPHY**, **GEOMETRY**, **HIERARCHYID**, and common language runtime (CLR) user-defined type (UDT) structures managed by Microsoft® SQL Server® 2008 R2. SQL Server provides the **geography**, **geometry**, and **hierarchyid** Microsoft® SQL Server® data types as well as the CLR UDTs that use these structures. The first two of these SQL Server types implement the OpenGIS Consortium's (OGC) Simple Feature Specification (SFS) (OGCSFS). Thus, the content of these structures closely mirrors the SFS.

The structures used to transfer **geography** and **geometry** data types are identical. In this document, the term "**GEOGRAPHY** structure" refers to both the **GEOGRAPHY** and **GEOMETRY** structures, except where it is necessary to distinguish between the two structures. Likewise, "**geography** data type" refers to both the **geography** and **geometry** SQL Server data types.

CLR UDTs allow users to extend the SQL Server type system by creating new types. These types can include any fields and methods defined by the user. The exact structure depends on the user who is implementing CLR UDTs. The SQL Server client program must contain the knowledge of the internal structure of each CLR UDT before it can read that type's binary format.

1.1 Glossary

The following terms are specific to this document:

MAY, SHOULD, MUST, SHOULD NOT, MUST NOT: These terms (in all caps) are used as described in [\[RFC2119\]](#). All statements of optional behavior use either MAY, SHOULD, or SHOULD NOT.

1.2 References

1.2.1 Normative References

We conduct frequent surveys of the normative references to assure their continued availability. If you have any issue with finding a normative reference, please contact dochelp@microsoft.com. We will assist you in finding the relevant information. Please check the archive site, <http://msdn2.microsoft.com/en-us/library/E4BD6494-06AD-4aed-9823-445E921C9624>, as an additional source.

[EPG] European Petroleum Survey Group, "EPSG Geodetic Parameter Dataset version 6.18.2", February 2009, <http://www.epsg.org/Geodetic.html>

[IEEE754] Institute of Electrical and Electronics Engineers, "Standard for Binary Floating-Point Arithmetic", IEEE 754-1985, October 1985, <http://ieeexplore.ieee.org/servlet/opac?punumber=2355>.

[MS-NRBF] Microsoft Corporation, ".NET Remoting: Binary Format Data Structure", July 2007.

[OGCSFS] Herring, J. R., "OpenGIS Implementation Specification for Geographic information – Simple feature access – Part 1: Common Architecture", OGC 06-103r3 Version 1.2.0, October 2006, http://portal.opengeospatial.org/files/?artifact_id=18241

[RFC2119] Bradner, S., "Key words for use in RFCs to Indicate Requirement Levels", BCP 14, RFC 2119, March 1997, <http://www.ietf.org/rfc/rfc2119.txt>

1.2.2 Informative References

[IRE1098] D.A. Huffman, "A Method for the Construction of Minimum-Redundancy Codes", Proceedings of the I.R.E., September 1952, pp 1098-1102, http://compression.ru/download/articles/huff/huffman_1952_minimum-redundancy-codes.pdf

[MS-CLRUDT] Microsoft Corporation, "CLR User-Defined Types", June 2009, <http://msdn.microsoft.com/en-us/library/ms131120.aspx>.

[MS-TDS] Microsoft Corporation, "[Tabular Data Stream Protocol Specification](#)", February 2008.

1.3 Structure Overview (Synopsis)

The **geography** and **geometry** data types are used by SQL Server to represent two-dimensional objects. The **geography** data type is designed to handle ellipsoidal coordinates, defined from a variety of standard Earth-shape references, and is used specifically to accommodate geospatial data. The **geometry** data type is nonspecific and can be used for geospatial and other spatial applications that use Cartesian coordinates.

Instances of the **geometry** and **geography** data types can be composed of a variety of complex features whose definitions are stored in various structures. These structures are described in detail later in this document.

The **hierarchyid** <1> data type is used by a SQL Server application to model tree structures in a more efficient way than was formerly possible. This data type significantly improves on the performance of current solutions (for instance, recursive queries).

Values of the **hierarchyid** data type represent nodes in a hierarchy tree. This data type is a system CLR type, so applications interpret it the same way they would interpret any SQL Server CLR UDT. The binary structure of the data type, described in detail later in this document, uses a variant on Huffman encoding to represent the path from the root of a tree to a particular node in that tree. For more information about Huffman encoding, see [\[IRE1098\]](#).

CLR UDTs can represent any type defined by the user. The user implements CLR UDTs as a structure using the CLR type system. The binary format of a CLR UDT depends on two factors. The first factor is the CLR UDT's internal structure, as defined by the user. The second factor is the serialization format also chosen by the user. Without knowing these two properties of a CLR UDT, one cannot decode the binary format.

The user implementing CLR UDTs can include primitive types and other structures. The structures can include other CLR UDTs. The set of types available for fields may be limited, depending on the serialization format chosen by the user.

The user can choose between two available serialization formats: SQL Server native UDT serialization, and user-defined UDT serialization. SQL Server native UDT serialization is designed for simple CLR UDTs that have a simple structure and only use a specified set of simple primitive types. User-defined UDT serialization is more flexible and allows users to define complex and more dynamic CLR UDTs.

To learn more about CLR UDTs, see [\[MS-CLRUDT\]](#).

1.4 Relationship to Protocols and Other Structures

All structures described in this document are designed to be transported over Tabular Data Stream protocol as described in section 2.2.5.5.2 of [\[MS-TDS\]](#).

In section [3](#) of this protocol document ("Structure Examples"), the examples that are provided use the Well-Known Text (WKT) protocol of the OGCSFS.

1.5 Applicability Statement

The spatial data format presented in this document is designed for the native code programmer (C and C++, for example) and documents the disk representation for the Microsoft® SQL Server® 2008 RC2 **geography** and **geometry** data types. Programmers using managed code (.NET) are encouraged to use the SQL CLR Types library (SQLSysClrTypes.msi) and the corresponding builder API. Please note that Microsoft reserves the right to make changes to this format at any time.

The **HIERARCHYID** format presented in this document is designed to be used solely with managed code (.NET) by using the SQL CLR Types library (SQLSysClrTypes.msi) and the corresponding APIs. Again, note that Microsoft reserves the right to make changes to this format at any time.

The format of CLR UDTs is designed to be used solely with managed code by using the same classes that define CLR UDTs in a SQL Server client program. As stated earlier in this document, without knowledge of the internal structure of a CLR UDT and the serialization format that it is using, it is impossible to read the CLR UDT from the binary data representing it.

1.6 Versioning and Localization

This document describes version 1 of the **GEOGRAPHY** and **HIERARCHY** structures. The version number for the **GEOGRAPHY** structure is stored in the **Version** field in the structure. The version number for the **HIERARCHY** structure is not stored anywhere in the structure. All fields in the **GEOGRAPHY** and **HIERARCHYID** structures contain either numeric or bit flag data. There are no localization implications for these structures.

SQL Server does not define any versioning scheme for CLR UDTs. Any version data created by the user must be part of a CLR UDT itself.

1.7 Vendor-Extensible Fields

GEOGRAPHY and **HIERARCHY** structures do not contain any extensible fields.

All fields of a CLR UDT are defined by the user who creates this type. The serialization format of these fields can also be selected by the user.

2 Structures

2.1 System CLR Types Structure

2.1.1 The GEOGRAPHY and GEOMETRY Structures

The **GEOGRAPHY** and **GEOMETRY** structures are stored using the binary format described later in this section. The **GEOGRAPHY** structure contains several fixed fields (or header fields) and three secondary structures that are repeated, as necessary, to describe the geography fully.

The **GEOGRAPHY POINT** structure contains the coordinates for an individual point and is repeated for as many points as are present in the **GEOGRAPHY** structure. One shape structure will appear for each OGC simple feature contained in the **GEOGRAPHY** structure. A shape can consist of multiple figures, each of which is defined by a single figure structure. The **GEOGRAPHY** structure contains flags and counts that indicate how many of these subsidiary structures are contained in the **GEOGRAPHY** structure.

2.1.2 The Basic GEOGRAPHY Structure

The **GEOGRAPHY** structure is formatted as shown in the following figure.

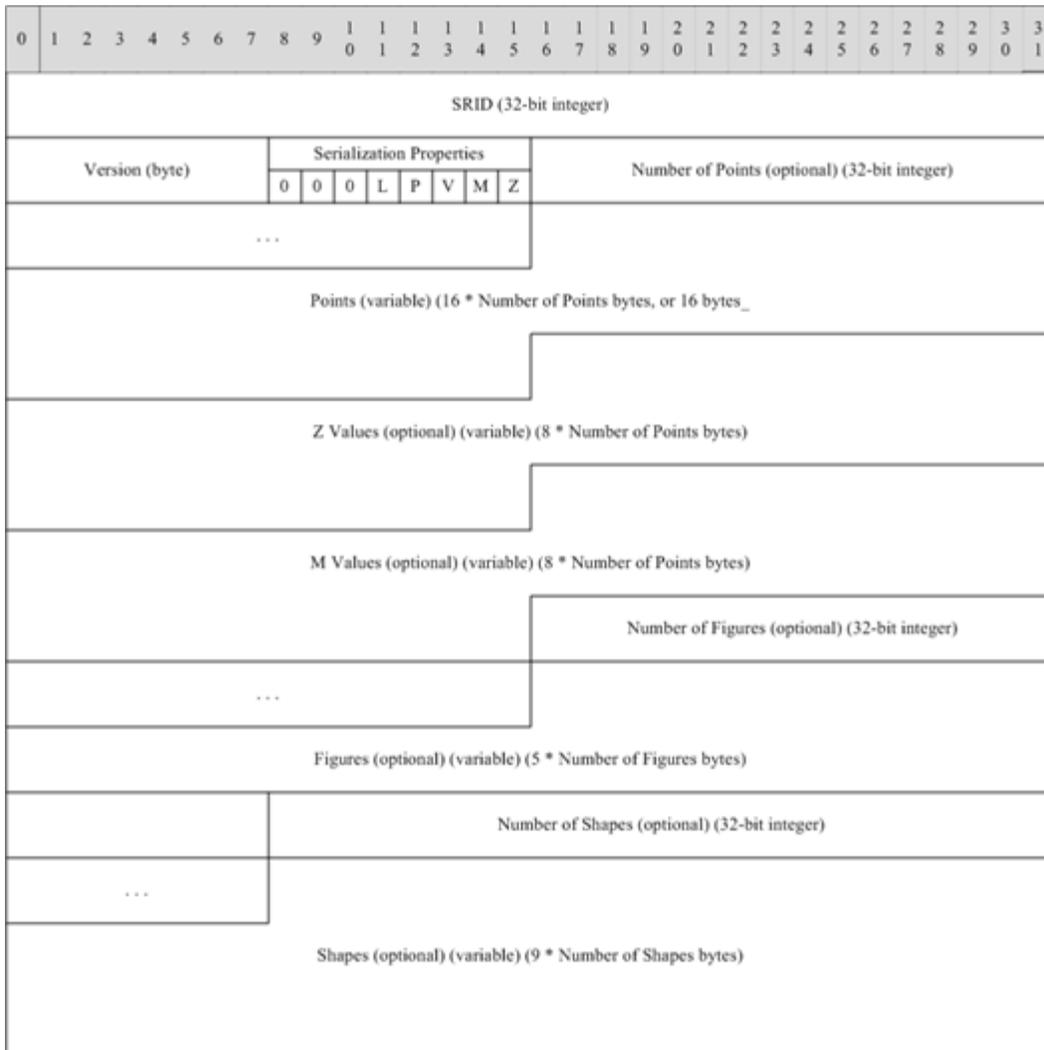


Figure 1: The GEOGRAPHY structure

All integer fields contain 32-bit integers. All double fields contain double-precision floating-point numbers that are 64 bits (8 bytes) long. Integers and double-precision floating-point numbers are expressed in little-endian format.

SRID (32 bit integer): The spatial reference identifier (SRID) for the geography.

GEOGRAPHY structures MUST use SRID values <2> in the range of 4120 through 4999, inclusive, with the exception of null geographies. A value of -1 indicates a null geography. When a null geography is indicated, all other fields are omitted.

Version (1-byte integer): The version of the **GEOGRAPHY** structure.

The current version is 1.

Serialization Properties (1-byte unsigned integer): A bit field containing individual bit flags indicating which optional content is present in the structure, as well as other attributes of the geography.

Z (0x01): Structure has Z values.

M (0x02): Structure has M values.

V (0x04): Geography is valid.

For **GEOGRAPHY** structures, **V** is always set. [<3>](#)

P (0x08): Geography contains a single point.

Number of Points, **Number of Figures**, and **Number of Shapes** are implicitly assumed to be equal to 1 and are omitted from the structure. In addition, **Figures** is implicitly assumed to contain one figure representing a **Stroke** with the **Point Offset** of 0 (zero). Lastly, **Shape** is implicitly assumed to contain one shape of type **Point**, with a **Figure Offset** of 0 (zero) and without any parents (**Parent Offset** set to -1). This is an optimization for the common case of a single point.

L (0x10): Geography contains a single line segment.

Number of Points is implicitly assumed to be equal to 2 and does not explicitly appear in the serialized data. In addition, **Figures** is implicitly assumed to contain one stroke figure (**0x01**) with a **Point Offset** of 0 (zero). Lastly, **Shape** is implicitly assumed to contain one shape of type **0x02** (LineString), with a **Figure Offset** of 0 and without any parents (**Parent Offset** set to -1).

P and L are mutually exclusive properties.

Number of Points (optional) (32 bit integer): The number of points in the **GEOGRAPHY** structure.

This **MUST** be a strictly positive number. If either the **P** or **L** bit is set in the **Serialization Properties** bit field, this field is omitted from the structure.

Points (variable) (16 * Number of Points bytes, or 16 bytes): A sequence of point structures.

The point coordinates are contained in **GEOGRAPHY POINT** structures in **GEOGRAPHY** structures. Likewise, coordinates are contained in **GEOMETRY POINT** structures in **GEOMETRY** structures. Both structures contain a pair of doubles.

If neither the **P** nor **L** bit is set in the **Serialization Properties** bit field, there will be **Number of Points** points in the sequence. If the **P** bit is set, there will be one point. If the **L** bit is set, there will be two points.

Z Values (optional) (variable) (8 * Number of Points bytes): A sequence of double values for the Z value of each point.

If the **Z** bit is set, there will be **Number of Points** doubles in the array. If a Z value for an individual point is NULL, it is represented by QNaN [\[IEEE754\]](#).

M Values (optional) (variable) (8 * Number of Points bytes): A sequence of double values for the M value of each point.

If the **M** bit is set, there will be **Number of Points** doubles in the array. If an M value for an individual point is NULL, it is represented as QNaN [\[IEEE754\]](#).

Number of Figures (optional) (32 bit integer): The number of figures in the structure. This **MUST** be a strictly positive number.

Figures (optional) (variable) (5 * Number of Figure bytes): A sequence of figure structures.

Number of Shapes (optional) (32 bit integer): The number of shapes in the structure. This MUST be a strictly positive number.

Shapes (optional) (variable) (9 * Number of Shapes bytes): A sequence of shape structures.

2.1.3 The FIGURE Structure

The **FIGURE** structure defines the partitions in the **Points, Z Values**, and **M Values** sequences for each constituent of the simple feature represented by the geography. A simple feature may have more than one part, whereas the collection of simple feature types may contain more than one simple feature, as shown in the following figure.

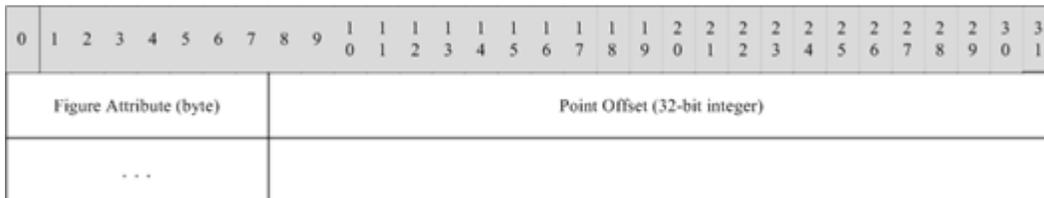


Figure 2: The FIGURE structure

Figure Attribute (1 byte): Determines the role of this figure within the **GEOMETRY** structure.

Valid values are as follows:

0 (0x00): Figure is an interior ring in a polygon. Interior rings represent holes in exterior rings.

1 (0x01): Figure is a stroke. A stroke is a point or a line.

2 (0x02): Figure is an exterior ring in a polygon. An exterior ring represents the outer boundary of a polygon.

The order of the coordinates in each ring of a geography polygon (but not a geometry polygon) is important. The outer rings for polygons are constructed using the "left-hand" rule to determine the interior region of a polygon shape. Thus, outer polygon rings have their **GEOGRAPHY POINT** coordinate pairs ordered in a counter-clockwise direction. Polygon holes are constructed using the "right-hand" rule. Thus, polygon holes have their **GEOGRAPHY POINT** coordinate pairs ordered in a clockwise direction.

Point Offset (32-bit integer): The offset to the **FIGURE** structure's first point in the **Points, Z Values**, and **M Values** sequences.

2.1.4 The SHAPE Structure

The **SHAPE** structure identifies each simple feature contained in the **GEOGRAPHY** structure. It links together the simple feature type, the figure that represents it, and the parent simple feature that contains the present simple feature (if there is one), as shown in the following figure.

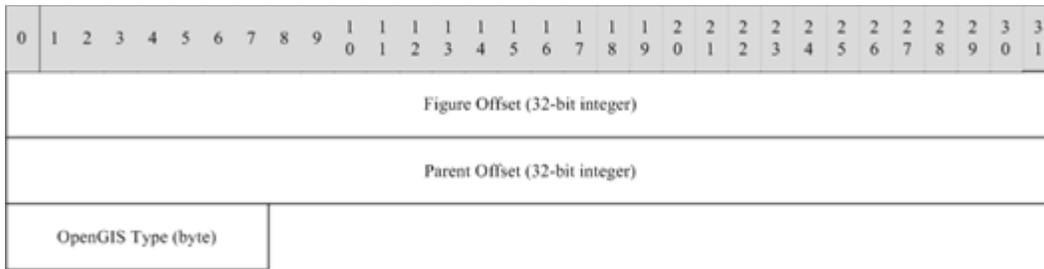


Figure 3: The SHAPE structure

Figure Offset (32-bit integer): The offset to the **SHAPE** structure’s **Figure** offset in the **Figures** sequence.

Parent Offset (32-bit integer): The offset to the **SHAPE** structure’s parent (containing) shape in the **Shapes** sequence if the shape has a parent, such as an outer ring if a hole, or a multipart simple feature.

OpenGIS Type (1 byte): The type of simple feature represented by the **SHAPE** structure.

Valid values are as follows:

- 0 (0x00):** Unknown
- 1 (0x01):** Point
- 2 (0x02):** LineString
- 3 (0x03):** Polygon
- 4 (0x04):** MultiPoint
- 5 (0x05):** MultiLine
- 6 (0x06):** MultiPolygon
- 7 (0x07):** GeometryCollection

2.1.5 The GEOGRAPHY POINT Structure

The **GEOGRAPHY POINT** structure contains latitude and longitude coordinates as double values representing a point located on a spheroid, as shown in the following figure.

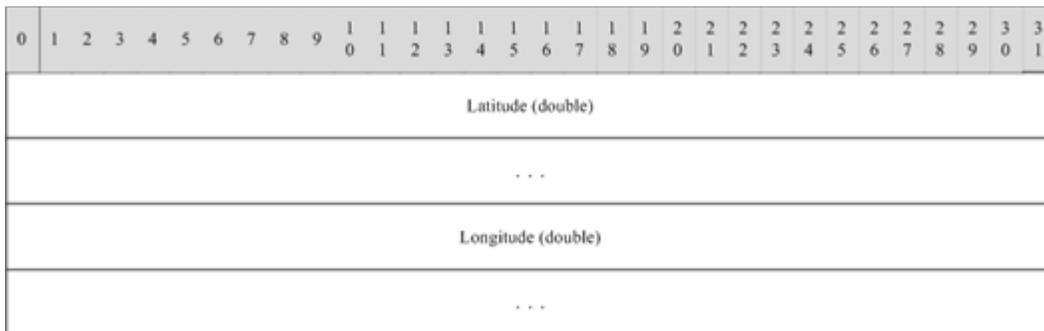


Figure 4: The GEOGRAPHY POINT structure

Latitude (8byte double): The **GEOGRAPHY POINT** structure's latitude.

Longitude (8-byte double): The **GEOGRAPHY POINT** structure's longitude.

- Latitude and longitude coordinates are stored as decimal degree values. Negative values are used to designate south latitude and west longitude values.
- Latitude values MUST be between -90 and 90 degrees inclusively.
- Longitude values MUST be between -15069 and 15069 degrees, inclusive.
- Latitude and Longitude values MUST NOT contain Infinity or NaN [\[IEEE754\]](#).

2.1.6 The GEOMETRY POINT Structure

The **GEOMETRY POINT** structure contains x and y coordinates as double values representing a point located on a plane, as shown in the following figure.

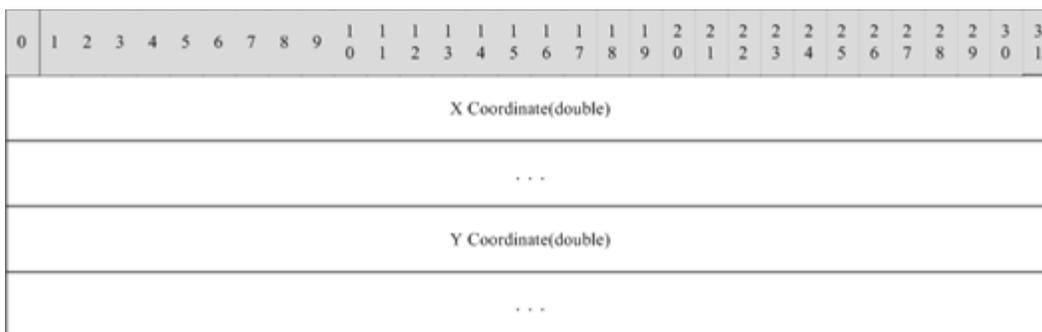


Figure 5: The GEOMETRY POINT structure

X Coordinate (8 byte double): The **GEOMETRY POINT** structure's x coordinate.

Y Coordinate (8 byte double): The **GEOMETRY POINT** structure's y coordinate.

X Coordinate and **Y Coordinate** values MUST NOT contain Infinity or NaN. Otherwise, there are no limitations on the values of x and y [\[IEEE754\]](#).

2.2 The HIERARCHYID Structure

2.2.1 Logical Definition

A hierarchy tree is an abstract ordered tree. This means that for each node n , there is a "less-than" ($<$) order relation on all children of n . This tree has infinite depth. For each node n in the tree, the children of n are in 1-to-1 correspondence with finite nonempty sequences of integers, which are called node labels. Given any two children $m1$ and $m2$ of n , $m1 < m2$ if and only if the label of $m1$ comes before the label of $m2$ in the lexicographical order in integer sequences. Thus, for a node n , each child of n has siblings before and after it, and any two children of n have siblings between them.

The logical representation of a node label for a child of a given node is a sequence of integers separated by dots (for example, 1, 1.3, or -7.0.-8.9). The **hierarchyid** data type logically encodes information about a single node in the hierarchy tree by encoding the path from the root of the tree to the node. Such a path is logically represented as a sequence of node labels of all children visited after the root. Each label is followed by a slash, and a slash begins the representation. Thus, a path

that only visits the root is represented by a single slash. For example, /, /1/, /0.3.-7/, /1/3/, and /0.1/0.2/ are valid **hierarchyid** paths of lengths 1, 2, 2, 3, and 3, respectively.

The **hierarchy** data type represents a node in the hierarchy tree based on a binary encoding of the following logical representation. This encoding is described in section [3.1.2](#).

2.2.2 Physical Representation

We encode the logical representation of a node in the hierarchy tree into a sequence of bits according to the following representation:

L₀	O₀	F₀	L₁	O₁	F₁	...	L_k	O_k	F_k	W
----------------------	----------------------	----------------------	----------------------	----------------------	----------------------	-----	----------------------	----------------------	----------------------	----------

In the preceding diagram, each L₁/O₁ pair encodes one integer in the logical representation of the node; each F₁ is a single bit that is 0 (zero) if the integer is followed by a dot in the logical representation, and 1 if it is followed by a slash. W is a string of 0 to 7 bits, padding the representation to the nearest byte; all of the bits in W have value 0.

In the following text, we refer to each L₁/O₁/F₁ triple as a level. If F₁ is 0 (zero), the level is said to be *fake*; otherwise, it is said to be *real*.

L₁/O₁ pairs encode an integer according to the following description. If the *i*th integer in the logical representation of the node is *n*, the L₁/O₁ pair encodes *n* for real levels and *n*+1 for fake levels. This is done so that, in varbinary (variable-length binary data) comparisons, fake levels compare above real levels.

Each L₁ prefix of an L₁/O₁ pair specifies a range of integers and a bit size for the following O₁ field, as shown in the following table. Each O₁ field has some antiambiguity bits that are always of a fixed value for a particular L₁ value. These bits are used to enable unambiguous backward parsing of the representation. The third column of the table shows the format of L₁/O₁ pair with antiambiguity bits in the O₁ field, with all other bits of the O₁ field shown as dots.

The actual value of the integer encoded is the value of the O₁ field (ignoring antiambiguity bits and interpreting the rest of the bits as an unsigned integer) added to the lower limit of the range corresponding to the L₁ field.

L₁	Bit size of O₁ (without/with antiambiguity bits)	Full format of the L₁/O₁ pair	Range
000100	48/53	000100.....0.....0.....0...0.1...	-281479271682120 to -4294971465
000101	32/36	000101.....0.....0...0.1...	-4294971464 to - 4169
000110	12/15	000110.....0..0.1...	-4168 to -73
0010	6/8	0010..0.1...	-72 to -9
00111	3/3	00111...	-8 to -1
01	2/2	01..	0 to 3
100	2/2	100..	4 to 7

L₁	Bit size of O₁ (without/with antiambiguity bits)	Full format of the L₁/O₁ pair	Range
101	3/3	101...	8 to 15
110	6/8	110..0.1...	16 to 79
1110	10/13	1110...0...0.1...	80 to 1103
11110	12/15	11110.....0...0.1...	1104 to 5199
111110	32/36	111110.....0.....0...0.1...	5200 to 4294972495
111111	48/53	111111.....0.....0.....0...0.1...	4294972496 to 281479271683151

No integer outside of the range -281479271682120 – 281479271683119 can be represented in this encoding.

Also, note that the encoding used in the **hierarchyid** data type is limited to 892 bytes. Consequently, nodes that have too many levels in their representation to fit into 892 bytes cannot be represented by the **hierarchyid** data type.

The encoding for the root node is a binary string of length 0 (zero). Thus, there are 0 levels and no W field.

Note The encoding represented in the preceding table has three useful properties:

- It is parsable. That is, for any binary string, there is at most one interpretation of it as a sequence of L₁/O₁/F₁ triples, and there is an efficient parsing algorithm.
- The representation is also parsable backward (that is, starting from the last byte). This enables an algorithm to determine a node's parent without having to parse the entire binary string.
- Comparing two encodings by lexicographical binary comparison is equivalent to conducting depth-first comparisons on the corresponding tree nodes.

2.3 CLR UDTs

This section describes the binary format of CLR UDTs.

SQL Server allows the user to choose between two serialization formats that affect the binary format of a CLR UDT. SQL Server native UDT serialization is designed for simple CLR UDTs that have a simple structure and only use a certain set of simple primitive types. User-defined UDT serialization is more flexible and allows the user to define complex and more dynamic CLR UDTs.

2.3.1 SQL Server Native UDT Serialization

SQL Server native UDT serialization is designed to simplify serialization of simple CLR UDTs. Therefore, CLR UDTs using SQL Server native UDT serialization need to adhere to certain limitations, as described in this section.

All primitive fields MUST be of one of the following types:

BOOL, BYTE, SBYTE, USHORT, SHORT, UINT, INT, ULONG, LONG, FLOAT, DOUBLE, SqlByte, SqlInt16, SqlInt32, SqlInt64, SqlBoolean, SqlSingle, SqlDouble, SqlDateTime, SqlMoney

CLR UDTs using SQL Server native UDT serialization can contain nested structures. Fields defined by these nested structures must adhere to the same limits that apply to fields of CLR UDTs using SQL Server native UDT serialization.

The binary format of a CLR UDT using SQL Server native UDT serialization is defined by all of the UDT's fields, in the order in which they are defined by the user. The format of each field depends on its type.

2.3.1.1 Binary Format of Each Byte

Each data type formatted using SQL Server native UDT serialization consists of a series of bytes. Each byte is formatted as 8 bits representing the byte value in binary representation in a little-endian bit ordering (formatting all bits in order of their significance, starting with the least significant bit and ending with the most significant bit).

2.3.1.2 Binary Format of Primitive Types

- **BOOL** values are represented as a single byte. Depending on the **BOOL** value, the byte takes one of the following two values: 0x01 for **True** or 0x00 for **False**.
- **BYTE** values are represented as a single byte.
- **SBYTE** values are represented as a single byte, but the most significant bit is reversed from 0 (zero) to 1 or from 1 to 0.
- **USHORT** values are represented as 2 bytes. The most significant byte is first, followed by the least significant byte.
- **SHORT** values are represented as 2 bytes. The most significant byte is first, and it has the most significant bit reversed from 0 (zero) to 1 or from 1 to 0. It is followed by the least significant byte.
- **UINT** values are represented as 4 bytes, in the order of their significance, starting with the most significant byte and ending with the least significant byte.
- **INT** values are represented as 4 bytes, in the order of their significance, starting with the most significant byte and ending with the least significant byte. The most significant byte has the most significant bit reversed from 0 (zero) to 1 or from 1 to 0.
- **ULONG** values are represented as 8 bytes, in the order of their significance, starting with the most significant byte and ending with the least significant byte.
- **LONG** values are represented as 8 bytes, in the order of their significance, starting with the most significant byte and ending with the least significant byte. The most significant byte has the most significant bit reversed, from 0 (zero) to 1 or from 1 to 0.
- **FLOAT** values are represented as defined by 4-byte, [IEEE754](#) single-precision, floating-point format, but the order of the bytes is reversed.

For positive values (including positive 0 (zero)), the most significant bit of the first byte is reversed from 0 (zero) to 1.

For negative 0 (zero), all bits remain unchanged.

- **DOUBLE** values are represented as defined by 8-byte, [\[IEEE754\]](#) double-precision, floating-point format, but the order of the bytes is reversed.

For positive values (including positive 0 (zero)), the most significant bit of the first byte is reversed, from 0 (zero) to 1.

For negative values, all bits of all bytes are reversed, from 0 (zero) to 1 or from 1 to 0.

For negative 0 (zero), all bits remain unchanged.

- **SqlByte** values are represented as 2 bytes. The first byte is a **BOOL** value that indicates whether or not the **SqlByte** value is NULL (**True** indicates that this value is NULL; **False** indicates that it is not NULL). The second byte is the actual **BYTE** value representing the **SqlByte** value.
- **SqlInt16** values are represented as 3 bytes. The first byte is a **BOOL** value that indicates whether or not the **SqlInt16** value is NULL (**True** indicates that this value is NULL; **False** indicates that it is not NULL). The other 2 bytes are the actual **SHORT** value representing the **SqlInt16** value.
- **SqlInt32** values are represented as 5 bytes. The first byte is a **BOOL** value that indicates whether or not the **SqlInt32** value is NULL (**True** indicates that this value is NULL; **False** indicates that it is not NULL). The other 4 bytes are the actual **INT** value representing the **SqlInt32** value.
- **SqlInt64** values are represented as 9 bytes. The first byte is a **BOOL** value that indicates whether or not the **SqlInt64** value is NULL (**True** indicates that this value is NULL; **False** indicates that it is not NULL). The other 8 bytes are the actual **LONG** value representing the **SqlInt64** value.
- **SqlBoolean** values are represented as a single byte. Depending on the value of **SqlBoolean**, this byte can have any of the following three values: 0x00 for NULL, 0x01 for **False**, or 0x02 for **True**.
- **SqlSingle** values are represented as 5 bytes. The first byte is a **BOOL** value that indicates whether or not the **SqlSingle** value is NULL (**True** indicates that this value is NULL; **False** indicates that it is not NULL). The other 4 bytes are the actual **FLOAT** value representing the **SqlSingle** value.
- **SqlDouble** values are represented as 5 bytes. The first byte is a **BOOL** value that indicates whether or not the **SqlDouble** value is NULL (**True** indicates that this value is NULL; **False** indicates that it is not NULL). The other 4 bytes are the actual **DOUBLE** value representing the **SqlDouble** value.
- **SqlDateTime** values are represented as 9 bytes. The first byte is a **BOOL** value that indicates whether or not the **SqlDateTime** value is NULL (**True** indicates that this value is NULL; **False** indicates that it is not NULL). The next 4 bytes are an **INT** value representing the date as the number of days elapsed since 1/1/1900 (for dates before 1/1/1900, this will be a negative value). The final 4 bytes are an **INT** value representing the number of ticks elapsed since midnight of the day represented by the date part. The following rules can be used to calculate the number of elapsed ticks from the number of elapsed milliseconds:

Each second consists of 300 ticks. All ticks represent values with the number of milliseconds ending in 0, 3, or 7. For example: 000, 003, 007, 010, 013, 017, 020, ..., 990, 993, 997.

The valid range for **SqlDateTime** values is from 1753-1-1 00:00:00.000 through 9999-12-31 23:59:59.997.

- **SqlMoney** values are represented as 9 bytes. The first byte is a **BOOL** value that indicates whether or not the **SqlMoney** value is NULL (**True** indicates that this value is NULL; **False** indicates that it is not NULL). The other 8 bytes are a **LONG** value representing the **SqlMoney** value multiplied by 10000.

2.3.1.3 Nested Structures

CLR UDT using SQL Server native UDT serialization can include nested structures. Nested structures are represented by formatting all their fields in the order in which they are defined by the user.

2.3.2 User-Defined UDT Serialization

User-defined UDT serialization is used when SQL Server native UDT serialization does not provide enough flexibility to express more complex and dynamic structures. The user-defined approach allows users to implement their own serialization formats using types defined in .NET Remoting Binary Format.

For more information about .NET Remoting Binary Format, see [\[MS-NRBF\]](#).

3 Structure Examples

3.1 GEOGRAPHY and GEOMETRY Structure Examples

The following examples illustrate how a selection of simple features is represented in the structures defined in this document.

3.1.1 Example of an Empty Point Structure

POINT EMPTY is designed to handle a non-null condition when a function returns an empty set. This may occur, for instance, when two disjoint spatial features are intersected.

POINT EMPTY is represented by the following binary string:

```
0x00000000 01 04 00000000 00000000 01000000 FFFFFFFF FFFFFFFF 01
```

This string is interpreted as shown in the following table.

Binary value	Description
00000000	SRID = 0
01	Version = 1
04	Serialization Properties = V (is valid)
00000000	Number of Points = 0 (no points)
00000000	Number of Figures = 0 (no figures)
01000000	Number of Shapes = 1
FFFFFFFF	1st Shape Parent Offset = -1 (no parent)
FFFFFFFF	1st Shape Figure Offset = -1 (no figure)
01	1st Shape OpenGIS Type = 1 (point)

3.1.2 Example of a Geometry Point Structure

POINT(5 10) holds a 0-dimension feature that represents a point location. The following figure shows a geometry point feature located at the intersection of 5 on the x-axis and 10 on the y-axis (the actual point is surrounded by a circular symbol to make it easier to see).




Figure 6: A geometry point

POINT (5 10) in SRID 4326 is represented by the following binary string:

0xE6100000 01 0C 0000000000001440 0000000000002440

This string is interpreted as shown in the following table.

Binary value	Description
E6100000	SRID = 4326
01	Version = 1
0C	Serialization Properties = V + P (geometry is valid, single point)
0000000000001440	X = 5
0000000000002440	Y = 10

3.1.3 Example of a Linestring Structure

A LINESTRING is an ordered series of connected points. The LINESTRING (0 1 1, 3 2 2, 4 5 NULL) contains a Z value for each point location, with the last Z value being NULL. The following figure represents the x and y coordinates only for a geometry type.

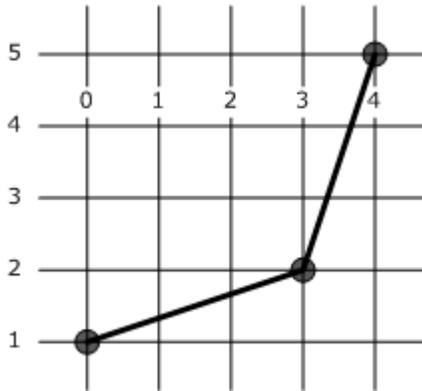


Figure 7: A geometry linestring

LINESTRING (0 1 1, 3 2 2, 4 5 NULL) is represented by the following binary string:

```
0xE6100000 01 05 03000000 0000000000000000 000000000000F03F 0000000000000840
0000000000000040 0000000000001040 0000000000001440 000000000000F03F
0000000000000040 000000000000F8FF 01000000 01 00000000 01000000 FFFFFFFF 00000000 02
```

This string is interpreted as shown in the following table.

Binary value	Description
E6100000	SRID = 4326
01	Version = 1
05	Serialization Properties = V + Z (geometry is valid, has Z values)
03000000	Number of Points = 3

Binary value	Description
0000000000000000	1st point X = 0
000000000000F03F	1st point Y = 1
0000000000000840	2nd point X = 3
0000000000000040	2nd point Y = 2
0000000000001040	3rd point X = 4
0000000000001440	3rd point Y = 5
000000000000F03F	1st point Z = 1
0000000000000040	2nd point Z = 2
000000000000F8FF	3rd point Z = QNaN
01000000	Number of Figures = 1
01	1st Figure Attribute = 1 (stroke)
00000000	1st Figure Point Offset = 0 (figure starts with 1st point)
01000000	Number of Shapes = 1
FFFFFFF	1st Shape Parent Offset = -1 (no parent)
00000000	1st Shape Figure Offset = 0 (shape starts with 1st figure)
02	1st Shape OpenGIS Type = 2 (linestring)

3.1.4 Example of a Geometry Collection Structure

A GEOMETRYCOLLECTION is a heterogeneous collection of simple features. The following figure shows a geography containing a single point, a single linestring, and a polygon with an interior ring (hole).

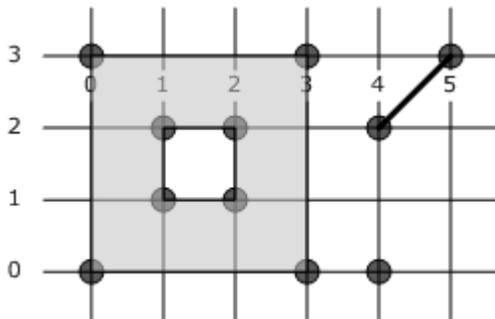


Figure 8: A geometry collection containing a point, a linestring, and a polygon with a hole

A GEOMETRYCOLLECTION (POINT (4 0), LINESTRING (4 2, 5 3), POLYGON ((0 0, 3 0, 3 3, 0 3, 0 0), (1 1, 1 2, 2 2, 2 1, 1 1))) is represented by the following binary string:

```

0xE6100000 01 04 0D000000
0000000000000000 000000000001040 000000000000040 000000000001040 000000000000840
000000000001440 0000000000000000 0000000000000000 0000000000000000 000000000000840
000000000000840 000000000000840 000000000000840 0000000000000000 0000000000000000
0000000000000000 00000000000F03F 00000000000F03F 000000000000040 00000000000F03F
000000000000040 000000000000040 00000000000F03F 000000000000040 00000000000F03F
00000000000F03F
04000000 01 00000000 01 01000000 02 03000000 00 08000000
04000000 FFFFFFFF 00000000 07 00000000 00000000 01 00000000 01000000 02
00000000 02000000 03

```

This string is interpreted as shown in the following table.

Binary value	Description
E6100000	SRID = 4326
01	Version = 1
04	Serialization Properties = V (geography is valid)
0D000000	Number of Points = 13
0000000000000000	1st point latitude = 0
000000000001040	1st point longitude = 4
000000000000040	2nd point latitude = 2
000000000001040	2nd point longitude = 4
000000000000840	3rd point latitude = 3
000000000001440	3rd point longitude = 5
0000000000000000	4th point latitude = 0
0000000000000000	4th point longitude = 0
0000000000000000	5th point latitude = 0
000000000000840	5th point longitude = 3
000000000000840	6th point latitude = 3
000000000000840	6th point longitude = 3
000000000000840	7th point latitude = 3
0000000000000000	7th point longitude = 0
0000000000000000	8th point latitude = 0
0000000000000000	8th point longitude = 0
00000000000F03F	9th point latitude = 1
00000000000F03F	9th point longitude = 1

Binary value	Description
0000000000000040	10th point latitude = 2
000000000000F03F	10th point longitude = 1
0000000000000040	11th point latitude = 2
0000000000000040	11th point longitude = 2
000000000000F03F	12th point latitude = 1
0000000000000040	12th point longitude = 2
000000000000F03F	13th point latitude = 1
000000000000F03F	13th point longitude = 1
04000000	Number of Figures = 4
01	1st Figure Attribute = 1 (stroke)
00000000	1st Figure Point Offset = 0 (figure starts with 1st point)
01	2nd Figure Attribute = 1 (stroke)
01000000	2nd Figure Point Offset = 1 (figure starts with 2nd point)
02	3rd Figure Attribute = 2 (exterior polygon ring)
03000000	3rd Figure Point Offset = 3 (figure starts with 4th point)
00	4th Figure Attribute = 0 (interior polygon ring)
08000000	4th Figure Point Offset = 8 (figure starts with 9th point)
04000000	Number of Shapes = 4
FFFFFFFF	1st Shape Parent Offset = -1 (no parent)
00000000	1st Shape Figure Offset = 0 (shape starts with 1st figure)
07	1st Shape OpenGIS Type = 7 (GeometryCollection)
00000000	2nd Shape Parent Offset = 0 (parent shape is 1st shape)
00000000	2nd Shape Figure Offset = 0 (shape starts with 1st figure)
01	2nd Shape OpenGIS Type = 1 (Point)
00000000	3rd Shape Parent Offset = 0 (parent shape is 1st shape)
01000000	3rd Shape Figure Offset = 1 (shape starts with 2nd figure)
02	3rd Shape OpenGIS Type = 2 (LineString)
00000000	4th Shape Parent Offset = 0 (parent shape is 1st shape)
02000000	4th Shape Figure Offset = 2 (shape starts with 3rd figure)
03	4th Shape OpenGIS Type = 3 (Polygon)

3.2 HIERARCHYID Examples

The root node is represented by an empty **HIERARCHYID** structure (that is, a zero-length bit sequence).

Example 1

The first child of the root node, with a logical representation of /1/, is represented as the following bit sequence:

```
01011000
```

The first two bits, 01, are the L1 field, meaning that the first node has a label between 0 (zero) and 3. The next two bits, 01, are the O1 field and are interpreted as the integer 1. Adding this to the beginning of the range specified by the L1 yields 1. The next bit, with the value 1, is the F1 field, which means that this is a "real" level, with 1 followed by a slash in the logical representation. The final three bits, 000, are the W field, padding the representation to the nearest byte.

Example 2

As a more complicated example, the node with logical representation /1/-2.18/ (the child with label -2.18 of the child with label 1 of the root node) is represented as the following sequence of bits (a space has been inserted after every grouping of 8 bits to make the sequence easier to follow):

```
01011001 11111011 00000101 01000000
```

The first three fields are the same as in the first example. That is, the first two bits (01) are the L1 field, the second two bits (01) are the O1 field, and the fifth bit (1) is the F1 field. This encodes the /1/ portion of the logical representation.

The next 5 bits (00111) are the L2 field, so the next integer is between -8 and -1. The following 3 bits (111) are the O2 field, representing the offset 7 from the beginning of this range. Thus, the L2 and O2 fields together encode the integer -1. The next bit (0) is the F2 field. Because it is 0 (zero), this level is fake, and we need to subtract 1 from the integer yielded by the L2 and O2 fields. Therefore, the L2, O2, and F2 fields together represent -2 in the logical representation of this node.

The next 3 bits (110) are the L3 field, so the next integer is between 16 and 79. The subsequent 8 bits (00001010) are the L4 field. Removing the antiambiguity bits from there (the third bit (0) and the fifth bit (1)) leaves 000010, which is the binary representation of 2. Thus, the integer encoded by the L3 and O3 fields is 16+2, which is 18. The next bit (1) is the F3 field, representing the slash (/) after the 18 in the logical representation. The final 7 bits (0000000) are the W field, padding the physical representation to the nearest byte.

3.3 CLR UDT Serialization Example

The following example of a CLR UDT contains all of the primitive types described in this document. The CLR UDT is defined in the C# programming language as follows.

```
[SqlUserDefinedType(Format.Native)]
public struct SampleNativeUdt : INullable
{
    public bool BoolValue;
    public byte ByteValue;
    public sbyte SByteValue;
    public short ShortValue;
    public ushort UShortValue;
    public int IntValue;
}
```

```

    public uint UIntValue;
    public long LongValue;
    public ulong ULongValue;
    public float FloatValue;
    public double DoubleValue;
    public SqlByte SqlByteValue;
    public SqlInt16 SqlInt16Value;
    public SqlInt32 SqlInt32Value;
    public SqlInt64 SqlInt64Value;
    public SqlDateTime SqlDateTimeValue;
    public SqlSingle SqlSingleValue;
    public SqlDouble SqlDoubleValue;
    public SqlMoney SqlMoneyValue;
    public SqlBoolean SqlBooleanValue;

    // Implementation methods
}

```

In the preceding example, the CLR UDT's fields are initialized with the following values.

```

BoolValue = true;
ByteValue = 1;
SByteValue = -2;
ShortValue = 3;
UShortValue = 4;
IntValue = -5;
UIntValue = 6;
LongValue = 7;
ULongValue = 8;
FloatValue = 123456789.0123456789;
DoubleValue = -123456789.0123456789;
SqlByteValue = 9;
SqlInt16Value = -10;
SqlInt32Value = 11;
SqlInt64Value = 12;
SqlDateTimeValue = "1/1/2000 12:00:00";
SqlSingleValue = -123456789.0123456789;
SqlDoubleValue = 123456789.0123456789;
SqlMoneyValue = "$13";
SqlBooleanValue = true;

```

Binary formatting of this CLR UDT produces the following stream of bytes in hexadecimal notation. Anything after "--" is a comment intended to improve the readability of this example and is not part of the binary format for this CLR UDT.

```

01 -- bool true
01 -- byte 1
7E -- sbyte -2
8003 -- short 3
0004 -- ushort 4
7FFFFFFB -- int -5
00000006 -- uint 6
8000000000000007 -- long 7
0000000000000008 -- ulong 8

```

```
CCEB79A3 -- float 123456789.0123456789
3E6290CBABF35BA7 -- double -123456789.0123456789
0109 -- SqlByte [bool true, byte 9]
017FF6 -- SqlInt16 [bool true, short -10]
018000000B -- SqlInt32 [bool true, int 11]
01800000000000000C -- SqlInt64 [bool true, long 12]
0180008EAC80C5C100 -- SqlDateTime [bool true, int 36524 days since 1/1/1900, int 12960000
ticks since midnight]
013314865C -- SqlSingle [bool true, float -123456789.0123456789]
01C19D6F34540CA458 -- SqlDouble [bool true, double 123456789.0123456789]
01800000000001FBD0 -- SqlMoney [bool true, long 130000]
02 -- SqlBoolean true
```

4 Security Considerations

None.

5 Appendix A: Product Behavior

The information in this specification is applicable to the following versions of Microsoft products:

- Microsoft® SQL Server® 2008 R2

Exceptions, if any, are noted below. Unless otherwise specified, any statement of optional behavior in this specification prescribed using the terms SHOULD or SHOULD NOT implies that the aforementioned Microsoft products' behavior is in accordance with the SHOULD or SHOULD NOT prescription. Unless otherwise specified, the term MAY implies that these Microsoft products do not follow the prescription.

[<1> Section 1.3:](#) Microsoft's implementation does not produce values outside of the range 00:00:00.0000000 through 23:59:59.9999999, but it will accept values outside of the range as described in section [2.4.2](#) in [\[MS-BINXML\]](#).

[<2> Section 2.1.2:](#) The SQL Server 2008 **geography** data type utilizes EPSG SRID values [\[EPSG\]](#), as published in EPSG Dataset version 6.17 (Release date: July 2008) for values 4120 through 4999, inclusive, with the exception of null geographies.

[<3> Section 2.1.2:](#) SQL Server 2008 never reads the **V** flag.

6 Change Tracking

This section identifies changes made to [MS-SSCLR] protocol documentation between November 2009 and March 2010 releases. Changes are classed as major, minor, or editorial.

Major changes affect protocol interoperability or implementation. Examples of major changes are:

- A document revision that incorporates changes to interoperability requirements or functionality.
- An extensive rewrite, addition, or deletion of major portions of content.
- A protocol is deprecated.
- The removal of a document from the documentation set.
- Changes made for template compliance.

Minor changes do not affect protocol interoperability or implementation. Examples are updates to fix technical accuracy or ambiguity at the sentence, paragraph, or table level.

Editorial changes apply to grammatical, formatting, and style issues.

No changes means that the document is identical to its last release.

Major and minor changes can be described further using the following revision types:

- New content added.
- Content update.
- Content removed.
- New product behavior note added.
- Product behavior note updated.
- Product behavior note removed.
- New protocol syntax added.
- Protocol syntax updated.
- Protocol syntax removed.
- New content added due to protocol revision.
- Content updated due to protocol revision.
- Content removed due to protocol revision.
- New protocol syntax added due to protocol revision.
- Protocol syntax updated due to protocol revision.
- Protocol syntax removed due to protocol revision.
- New content added for template compliance.
- Content updated for template compliance.

- Content removed for template compliance.
- Obsolete document removed.

Editorial changes always have the revision type "Editorially updated."

Some important terms used in revision type descriptions are defined as follows:

Protocol syntax refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.

Protocol revision refers to changes made to a protocol that affect the bits that are sent over the wire.

Changes are listed in the following table. If you need further information, please contact protocol@microsoft.com.

Section	Tracking number (if applicable) and description	Major change (Y or N)	Revision Type
2.1.2 The Basic GEOGRAPHY Structure	371836 Removed statements that Z and/or M must not be set if P or L is set.	N	Content removed due to protocol revision.
5 Appendix A: Product Behavior	Clarified the Microsoft product version that implements the information in the specification.	N	Content update.

7 Index

A

[Applicability statement](#) 6

B

[Basic GEOGRAPHY structure](#) 7

C

[Change tracking](#) 28

E

Examples

[Empty point structure](#) 18
[GEOGRAPHY structure](#) 18
[Geometry collection structure](#) 20
[Geometry point structure](#) 18
[GEOMETRY structure](#) 18
[Linestring structure](#) 19

F

[FIGURE structure](#) 10

G

[GEOGRAPHY POINT structure](#) 11
[GEOGRAPHY structure](#) 7
[GEOMETRY POINT structure](#) 12
[GEOMETRY structure](#) 7
[Glossary](#) 4

H

[HIERARCHYID examples](#) 23
[HIERARCHYID structure](#) 12
[Logical definition](#) 12
[Physical representation](#) 13

I

[Informative references](#) 5
[Introduction](#) 4

L

[Localization](#) 6

N

[Normative references](#) 4

P

Product behavior
[Endnotes](#) 27

R

References
[Informative](#) 4
[Normative](#) 4
[Relationship to protocols and other structures](#) 5

S

[Security considerations](#) 26
[SHAPE structure](#) 10
[Structure examples](#) 18
[Structure overview \(synopsis\)](#) 5
[Structures](#) 7
[FIGURE](#) 10
[GEOGRAPHY](#) 7
[GEOGRAPHY POINT](#) 11
[GEOMETRY](#) 7
[GEOMETRY POINT](#) 12
[SHAPE](#) 10
[System CLR Types structure](#) 7

T

[Tracking changes](#) 28

V

[Vendor-extensible fields](#) 6
[Versioning](#) 6