

[MS-SSSO-Diff]:

SQL Server System Overview

Intellectual Property Rights Notice for Open Specifications Documentation

- **Technical Documentation.** Microsoft publishes Open Specifications documentation for protocols, file formats, languages, standards as well as overviews of the interaction among each of these technologies.
- **Copyrights.** This documentation is covered by Microsoft copyrights. Regardless of any other terms that are contained in the terms of use for the Microsoft website that hosts this documentation, you may make copies of it in order to develop implementations of the technologies described in the Open Specifications and may distribute portions of it in your implementations using these technologies or your documentation as necessary to properly document the implementation. You may also distribute in your implementation, with or without modification, any schema, ~~IDL's~~IDL's, or code samples that are included in the documentation. This permission also applies to any documents that are referenced in the Open Specifications.
- **No Trade Secrets.** Microsoft does not claim any trade secret rights in this documentation.
- **Patents.** Microsoft has patents that may cover your implementations of the technologies described in the Open Specifications. Neither this notice nor Microsoft's delivery of the documentation grants any licenses under those or any other Microsoft patents. However, a given Open Specification may be covered by Microsoft [Open Specification Promise](#) or the [Community Promise](#). If you would prefer a written license, or if the technologies described in the Open Specifications are not covered by the Open Specifications Promise or Community Promise, as applicable, patent licenses are available by contacting jplq@microsoft.com.
- **Trademarks.** The names of companies and products contained in this documentation may be covered by trademarks or similar intellectual property rights. This notice does not grant any licenses under those rights. For a list of Microsoft trademarks, visit www.microsoft.com/trademarks.
- **Fictitious Names.** The example companies, organizations, products, domain names, ~~email~~email addresses, logos, people, places, and events depicted in this documentation are fictitious. No association with any real company, organization, product, domain name, email address, logo, person, place, or event is intended or should be inferred.

Reservation of Rights. All other rights are reserved, and this notice does not grant any rights other than specifically described above, whether by implication, estoppel, or otherwise.

Tools. The Open Specifications do not require the use of Microsoft programming tools or programming environments in order for you to develop an implementation. If you have access to Microsoft programming tools and environments you are free to take advantage of them. Certain Open Specifications are intended for use in conjunction with publicly available standard specifications and network programming art, and assumes that the reader either is familiar with the aforementioned material or has immediate access to it.

Revision Summary

Date	Revision History	Revision Class	Comments
03 <u>05</u> 3 <u>5</u> /2010	0.1	Major	First release.
04 <u>4</u> /21/2010	0.1.1	Editorial	Revised <u>Changed language</u> and edited <u>formatted in</u> the technical content.
06 <u>04</u> 6 <u>4</u> /2010	0.1.2	Editorial	Revised <u>Changed language</u> and edited <u>formatted in</u> the technical content.
09 <u>03</u> 9 <u>3</u> /2010	0.1.2	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
02 <u>09</u> 2 <u>9</u> /2011	0.1.2	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
07 <u>07</u> 7 <u>7</u> /2011	0.1.2	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
11/ 03 <u>3</u> /2011	0.1.2	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
01 <u>1</u> /19/2012	0.1.2	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
02 <u>2</u> /23/2012	0.1.2	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
03 <u>3</u> /27/2012	0.1.2	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
05 <u>5</u> /24/2012	0.1.2	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
06 <u>6</u> /29/2012	1.0	Major	Significantly changed <u>Updated and revised</u> the technical content.
07 <u>7</u> /16/2012	1.0	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
10/ 08 <u>8</u> /2012	2.0	Major	Significantly changed <u>Updated and revised</u> the technical content.
10/23/2012	2.0	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
03 <u>3</u> /26/2013	2.0	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
06 <u>6</u> /11/2013	2.0	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
08 <u>8</u> 8 <u>8</u> /2013	2.0	No change <u>None</u>	No changes to the meaning, language, or formatting of the technical content.
12/ 05 <u>5</u> /2013	2.0	No	No changes to the meaning, language, or formatting of

Date	Revision History	Revision Class	Comments
		change None	the technical content.
022/11/2014	3.0	Major	Significantly changed Updated and revised the technical content.
055/20/2014	3.0	No change None	No changes to the meaning, language, or formatting of the technical content.
5/10/2016	4.0	Major	Significantly changed the technical content.

Table of Contents

1	Introduction	7
1.1	Glossary.....	8
1.2	References	10
2	Functional Architecture	12
2.1	Overview.....	12
2.1.1	Network Connectivity and Application Development	12
2.1.2	Master Data Services	13
2.1.3	Reporting Services.....	14
2.1.4	Analysis Services	15
2.1.5	Database Engine.....	16
2.1.6	Complex Event Processing Engine	17
2.1.7	Manageability.....	17
2.2	Protocol Summary.....	18
2.2.1	Network Connectivity and Application Development	18
2.2.2	Master Data Services	19
2.2.3	Reporting Services.....	19
2.2.4	Analysis Services	20
2.2.5	Database Engine.....	21
2.2.6	CEP Engine	21
2.2.7	Manageability	22
2.3	Environment.....	22
2.3.1	Dependencies on This System	22
2.3.2	Dependencies on Other Systems or Components	22
2.3.3	Communications within the System.....	22
2.3.4	Assumptions and Preconditions.....	22
2.4	Use Cases	23
2.4.1	Network Connectivity and Application Development Use Cases	23
2.4.1.1	SQL Server Instance Discovery Use Case	23
2.4.1.2	Named SQL Server Instance Resolution/Enumeration	23
2.4.1.3	Client Connection (TDS, SSTDs, or SSNWS).....	24
2.4.2	MDS Integration Use Cases	26
2.4.2.1	Use the MDS UI to Query	26
2.4.2.2	Query a List from the MDS Store.....	26
2.4.3	Reporting Services Use Cases.....	26
2.4.3.1	Report Authoring, Management, and Viewing with Native Report Portal	26
2.4.3.2	Mobile Report Authoring, Management, and Viewing with Native Report Portal.....	27
2.4.3.3	Report Authoring, Management, and Viewing with External Report Portal.....	27
2.4.4	Analysis Services Use Cases.....	28
2.4.4.1	Authentication with the Analysis Server	28
2.4.4.2	Information Discovery	28
2.4.4.3	Sending an MDX Query	28
2.4.4.4	Sending a DAX Query	29
2.4.4.5	Usage Reporting	29
2.4.5	Database Engine Use Cases	29
2.4.5.1	Authentication with the Database Engine	29
2.4.5.2	Information Discovery	29
2.4.5.3	Sending a Query	29
2.4.6	CEP Engine Use Case.....	30
2.4.7	Manageability Use Case	30

2.5	Versioning, Capability Negotiation, and Extensibility	30
2.6	Error Handling	31
2.7	Coherency Requirements	31
2.8	Security	31
3	Examples	32
3.1	Configuring and Administering Multiple Servers.....	32
3.1.1	Analysis Services Authoring and Management	33
3.1.2	Reporting Services Authoring and Management	33
3.1.3	MDS Management.....	33
3.1.4	Database Engine Management.....	34
3.2	Obtaining Data.....	34
3.2.1	Obtaining Data via Analysis Services	34
3.2.2	Obtaining Data via Reporting Services	34
3.2.3	Obtaining Data via MDS.....	35
4	Microsoft Implementations.....	37
4.1	Product Behavior.....	37
5	Change Tracking	38
6	Index.....	40

~~1~~ Introduction

1 Introduction

The SQL Server System Overview document provides an overview of the client and server protocols that are used by Microsoft SQL Server. This document covers protocols that are commonly shared by SQL Server components and those protocols that are used only by specific components. Where appropriate, this document describes the relationships between protocols and provides example scenarios to show how they are used.

SQL Server is a data platform that includes several data management and analysis technologies. This document covers those elements of the platform that require protocols that interoperate.

- ~~—~~Master Data Services: The Master Data Services (MDS) service and API provide a service-oriented design architecture (SOA) that encapsulates and modularizes the internal workings of SQL Server, in addition to a standard API to interact and integrate with SQL Server Master Data Services. The SQL Server MDS framework ensures that the internal functions of the product are better modularized to support both an API and a modular component development. [For more information, see \[MSDN-MDS\]](#).
- ~~—~~Reporting Services: Reporting Services delivers enterprise, web-enabled reporting functionality for creating reports that draw content from a variety of data sources, for publishing reports in various formats, and for centrally managing security and subscriptions. For more information, see [MSDN-SSRS].
- ~~—~~Analysis Services: Analysis Services supports [onlinehigh performance analytical processing \(OLAP\)applications](#) by enabling an implementer to design, create, ~~and~~ manage [multidimensional structures that containand query Multidimensional and Tabular data that is aggregated from other data sources, such as relational databases.models](#). For more information, see [MSDN-ASMD].
- ~~—~~Database Engine: The Database Engine is the core service for storing, processing, and securing data. The Database Engine provides controlled access and rapid transaction processing to meet the requirements of the most demanding data-consuming applications within an enterprise. The Database Engine also provides rich support for sustaining high availability. For more information, see [MSDN-SSDBEng].
- ~~—~~Complex event processing: **Complex event processing (CEP)** is the continuous and incremental processing of event (data) **streams** from multiple sources based on declarative query and pattern specifications with near-zero latency. The goal is to identify meaningful patterns, relationships, and data abstractions from among seemingly unrelated events and to trigger immediate response actions. Typical event stream sources include data from manufacturing applications, financial trading applications, web analytics, and operational analytics. The CEP Engine provides a dedicated web service to handle requests from client applications for managing the system.

To deliver these functionalities, SQL Server uses seven major sets of protocols:

- ~~—~~Network connectivity and application development
- ~~—~~Master Data Services
- ~~—~~Reporting Services
- ~~—~~Analysis Services
- ~~—~~Database Engine
- ~~—~~Complex event processing engine
- ~~—~~Manageability

This document provides an overview of the protocols that may be used by one or more of the SQL Server products that are listed in Microsoft SQL Server 2005, Microsoft SQL Server 2008, Microsoft SQL Server 2008 R2, Microsoft SQL Server 2012, and Microsoft SQL Server 2014. The specific implementations (section 4). Specific release information for each protocol is indicated when the information applies to a particular release in the individual technical specifications only, unless otherwise indicated in the summary information provided in section 2.2.

1.1 ~~1.1~~ Glossary

~~The~~ This document uses the following terms ~~are defined in [MS-GLOS]:~~

~~Active Directory
connection
remote procedure call (RPC)
session
SOAP
stream
Transmission Control Protocol (TCP)
web services~~

~~The following terms are defined in [MS-OFCGLOS]:~~

~~connection string
OLE DB
Online Analytical Processing (OLAP)~~

~~The following terms are specific to this document:~~

Active Directory: A general-purpose network directory service. Active Directory also refers to the Windows implementation of a directory service. Active Directory stores information about a variety of objects in the network. Importantly, user accounts, computer accounts, groups, and all related credential information used by the Windows implementation of Kerberos are stored in Active Directory. Active Directory is either deployed as Active Directory Domain Services (AD DS) or Active Directory Lightweight Directory Services (AD LDS). [MS-ADTS] describes both forms. For more information, see [MS-AUTHSOD] section 1.1.1.5.2, Lightweight Directory Access Protocol (LDAP) versions 2 and 3, Kerberos, and DNS.

analysis server: ~~A server that provides both OLAP and data mining services~~ supports high performance and complex analytics for business intelligence applications.

common language runtime user-defined type (CLR-UDT): ~~A data type that is created and defined by the user in SQL Server by using a Microsoft .NET Framework CLR assembly for executing applications. The common language runtime supplies managed code with services such as cross-language integration, code access security, object lifetime management, and debugging and profiling support.~~

complex event processing (CEP): The continuous and incremental processing of event streams from multiple sources, based on declarative query and pattern specifications with near-zero latency.

~~**data stream:** A stream of data that corresponds to specific Tabular Data Stream (TDS) semantics. A single data stream can represent an entire TDS message or only a specific, well-defined portion of a TDS message. A TDS data stream can span multiple network data packets.~~

connection string: A series of arguments, delimited by a semicolon, that defines the location of a database and how to connect to it.

ODBC application: An application that uses Open Database Connectivity (ODBC) to access data sources.

OLE DB: A set of interfaces that are based on the Component Object Model (COM) programming model and expose data from a variety of sources. These interfaces support the amount of Database Management System (DBMS) functionality that is appropriate for a data store and they enable a data store to share data.

OLE DB consumer: A software component that requests information through a set of OLE DB interfaces.

OLE DB provider: A software component that returns information to an OLE DB consumer through a set of OLE DB interfaces. Each provider exposes data access to a particular type of data source.

Online Analytical Processing (OLAP): A technology that uses multidimensional structures to provide access to data for analysis. The source data for OLAP is stored in data warehouses in a relational database. See also cube.

Open Database Connectivity (ODBC): A standard software API method for accessing data that is stored in a variety of proprietary personal computer, minicomputer, and mainframe databases. ~~ODBC~~ is an implementation of [ISO/IEC9075-3:2008] and provides extensions to that standard.

remote procedure call (RPC): A context-dependent term commonly overloaded with three meanings. Note that much of the industry literature concerning RPC technologies uses this term interchangeably for any of the three meanings. Following are the three definitions: (*) The runtime environment providing remote procedure call facilities. The preferred usage for this meaning is "RPC runtime". (*) The pattern of request and response message exchange between two parties (typically, a client and a server). The preferred usage for this meaning is "RPC exchange". (*) A single message from an exchange as defined in the previous definition. The preferred usage for this term is "RPC message". For more information about RPC, see [C706].

report server: A location on the network to which clients can connect by using SOAP over HTTP or SOAP over HTTPS to publish, manage, and execute reports.

1.2—References

session: A collection of state information on a directory server. An implementation of the SOAP session extensions (SSE) is free to choose the state information to store in a session.

SOAP: A lightweight protocol for exchanging structured information in a decentralized, distributed environment. SOAP uses XML technologies to define an extensible messaging framework, which provides a message construct that can be exchanged over a variety of underlying protocols. The framework has been designed to be independent of any particular programming model and other implementation-specific semantics. SOAP 1.2 supersedes SOAP 1.1. See [SOAP1.2-1/2003].

stream: A sequence of bytes written to a file on the NTFS file system. Every file stored on a volume that uses the NTFS file system contains at least one **stream**, which is normally used to store the primary contents of the file. Additional **streams** within the file may be used to store file attributes, application parameters, or other information specific to that file. Every file has a default data **stream**, which is unnamed by default. That data **stream**, and any other data **stream** associated with a file, may optionally be named.

Transact-SQL: The Microsoft proprietary version of SQL, the structured query language.

Transmission Control Protocol (TCP): A protocol used with the Internet Protocol (IP) to send data in the form of message units between computers over the Internet. TCP handles keeping track of the individual units of data (called packets) that a message is divided into for efficient routing through the Internet.

user-defined type (UDT): User-defined types can extend the scalar type system of the protocol server database, enabling storage of **common language runtime** objects in a protocol server database. UDTs can contain multiple elements, and they can have behaviors to differentiate them from the traditional alias data types that consist of a single protocol server system data type.

web service: A software system designed to support interoperable machine-to-machine interaction over a network, using XML-based standards and open transport protocols.

1.2 References

Links to a document in the Microsoft Open Specifications library point to the correct section in the most recently published version of the referenced document. However, because individual documents in the library are not updated at the same time, the section numbers in the documents may not match. You can confirm the correct section numbering by checking the Errata.

[MC-SMP] Microsoft Corporation, "Session Multiplex Protocol".

[MC-SQLR] Microsoft Corporation, "SQL Server Resolution Protocol".

~~[MS-ASUR] Microsoft Corporation, "Analysis Services Usage Reporting".~~

[MS-BINXML] Microsoft Corporation, "SQL Server Binary XML Structure".

[MS-CEPM] Microsoft Corporation, "Microsoft Complex Event Processing Engine Manageability Protocol".

[MS-DSDG] Microsoft Corporation, "DataSet DiffGram Structure".

[MS-DSDIFFGRAM] Microsoft Corporation, "SharePoint Web Services: DataSet DiffGram Structure".

~~[MS-GLOS] Microsoft Corporation, "Windows Protocols Master Glossary".~~

[MS-LETSF] Microsoft Corporation, "LINQ Expression Tree Serialization Format".

[MS-ODBCSTR] Microsoft Corporation, "ODBC Connection String Structure".

~~[MS-OFCGLOS] Microsoft Corporation, "Microsoft Office Master Glossary".~~

[MS-OLEDBSTR] Microsoft Corporation, "OLEDB Connection String Structure".

[MS-RDL] Microsoft Corporation, "Report Definition Language File Format".

[MS-RGDI] Microsoft Corporation, "Remote GDI+ (RGDI) Binary Stream Format-~~Structure~~".

[MS-RPL] Microsoft Corporation, "Report Page Layout (RPL) Binary Stream Format-~~Structure~~".

[MS-RSREST] Microsoft Corporation, "Reporting Services REST API".

[MS-RSWSRE2005] Microsoft Corporation, "Report Server Web Service for Report Execution: ReportExecution2005".

[MS-RSWSRM2010] Microsoft Corporation, "Report Server Web Service for Report Management: ReportService2010".

[MS-RSWSRMNM2005] Microsoft Corporation, "Report Server Web Service for Report Management Native Mode: ReportService2005".

[MS-RSWSRMSM2006] Microsoft Corporation, "Report Server Web Service for Report Management SharePoint Mode: ReportService2006".

[MS-RSWSSFA] Microsoft Corporation, "Report Server Web Service for SharePoint Forms Authentication: ReportServiceAuthentication".

[MS-SSAS-T] Microsoft Corporation, "SQL Server Analysis Services ~~Protocol~~ Tabular".

[MS-SSAS8] Microsoft Corporation, "SQL Server Analysis Services Version 8.0 Protocol".

~~[MS-SSAS] Microsoft Corporation, "SQL Server Analysis Services Protocol".~~

[MS-SSCLRT] Microsoft Corporation, "Microsoft SQL Server CLR Types Serialization Formats".

[MS-SSDPWP] Microsoft Corporation, "Database Publishing Wizard Protocol".

~~[MS-SSMDSWS-15] Microsoft Corporation, "Master Data Services Web Service 15".~~

[MS-SSMDSWS] Microsoft Corporation, "Master Data Services Web Service".

[MS-SSNWS] Microsoft Corporation, "Native Web Services Protocol".

[MS-SSTDS] Microsoft Corporation, "Tabular Data Stream Protocol Version 4.2".

[MS-TDS] Microsoft Corporation, "Tabular Data Stream Protocol".

[MSDN-ASMD] Microsoft Corporation, "Analysis Services", <http://msdn.microsoft.com/en-us/library/bb522607.aspx>

~~[MSDN-MDS] Microsoft Corporation, "Master Data Services", <https://msdn.microsoft.com/en-us/library/ee633763.aspx>~~

[MSDN-SSDBEng] Microsoft Corporation, "SQL Server Database Engine", <http://msdn.microsoft.com/en-us/library/ms187875.aspx>

~~[MSDN-SSRS]~~ [MSDN-SSRS] Microsoft Corporation, "Reporting Services (SSRS)", <http://msdn.microsoft.com/en-us/library/ms159106.aspx>

[RFC2279] Yergeau, F., "UTF-8, a transformation format of ISO 10646", RFC 2279, January 1998, <http://www.rfc-editor.org/rfc/rfc2279.txt>

~~[ISO/IEC9075-3:2008] ISO/IEC, "Information technology — Database languages — SQL — Part 3: Call-Level Interface (SQL/CLI)", ISO/IEC 9075-3:2008, July 2008, http://www.iso.org/iso/iso_catalogue/catalogue_tc/catalogue_detail.htm?csnumber=38641~~

~~**Note** There is a charge to download the specification.~~

2 ~~2~~ Functional Architecture

Microsoft SQL Server delivers a rich set of integrated services that enable a user to query, search, synchronize, report, and analyze data. This section describes the architecture to deliver and support this framework.

2.1 ~~2.1~~ Overview

2.1 ~~2.1~~ Microsoft Overview

SQL Server is a database management and analysis system for e-commerce, line-of-business, and data warehousing solutions, providing storage and query retrieval.

The following figure shows a high-level architectural view of SQL Server elements that work together to achieve interoperability. Note that Microsoft delivers the implementation of the protocols described as client access libraries, which are used by Microsoft and third-party applications.

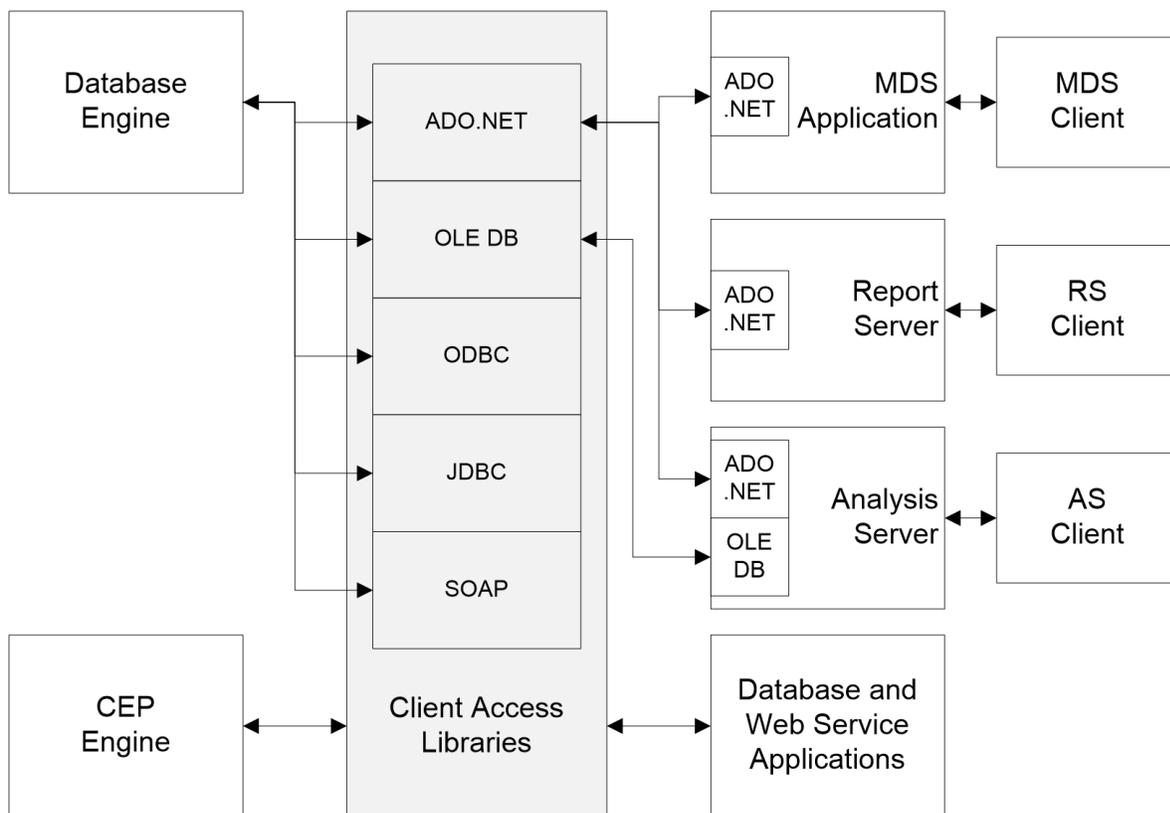


Figure 14: SQL Server architecture overview

2.1.1 ~~2.1.1~~ Network Connectivity and Application Development

2.1.1 ~~2.1.1~~ Network Connectivity and Application Development

Network connectivity and application development include protocols and formats that are used for communication between the SQL Server Browser, the application, and the Database Engine (as shown in the following figure). [For more information about the Database Engine, see section 2.1.5.](#)

The Native Web Services protocol [MS-SSNWS] is used to transfer Transact-SQL requests and responses between **web service** client applications and the Database Engine.

The protocols that are used between ~~the~~ database applications and the Database Engine are the Session Multiplex Protocol [MC-SMP], which is used to multiplex database communication **sessions** over a single reliable transport connection, and the Tabular Data Stream (TDS) protocol, which is specified in [MS-TDS] and [MS-SSTDS] and is used to transfer Transact-SQL requests and responses between clients and database products.

~~The Tabular Data Stream (TDS) protocol also uses the binary XML structure [MS-BINXML], the OLE DB connection string structure [MS-OLEDBSTR], the Open Database Connectivity (ODBC) connection string structure [MS-ODBCSTR], and the system-provided and user-defined SQL Server CLR types [MS-SSCLRT].~~

The SQL Server Browser uses the SQL Server Resolution Protocol [MC-SQLR] to resolve the name of a named database server instance and to enumerate available database server instances.

The Microsoft ADO.NET **DataSet DiffGram** structure specification [MS-DSDG] describes how a **DataSet**, a component in the .NET Framework, serializes schema and data for transmission over a network. The Microsoft SharePoint **DataSet DiffGram** structure [MS-DSDIFFGRAM] is used to represent the results of a SharePoint Search service web service call; the **DiffGram** structure is useful for serializing schema and data for transmission over a network or for storage on disk. Note that the **DiffGram** specification that is used by the SharePoint Search service is a subset of the full **DiffGram** structure that is used by the ADO.NET **DataSet**.

~~The Binary XML structure [MS-BINXML] and the OLEDB connection string structure [MS-OLEDBSTR] are used by SQL Server Analysis Services [MS-SSAS] and the TDS protocol. The Open Database Connectivity (ODBC) connection string structure [MS-ODBCSTR] is used by the TDS protocol.~~

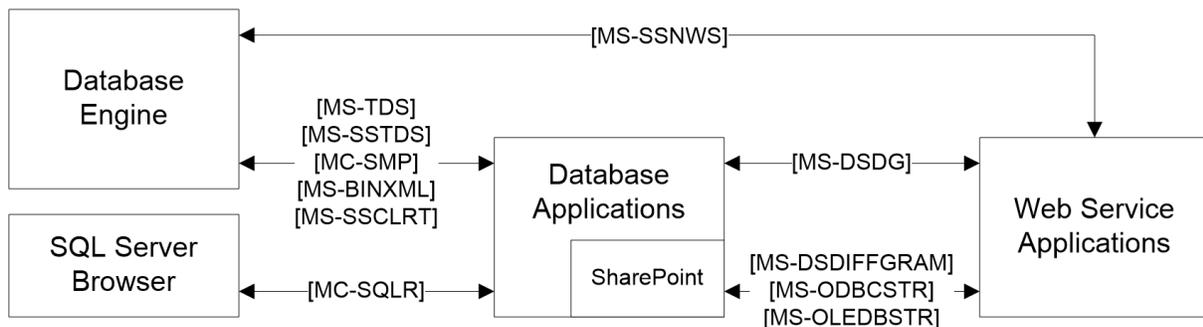


Figure 22.: Network connectivity and application development architecture

~~2.1.1~~ 2.1.2 ~~2.1.2~~ Master Data Services

Master Data Services (MDS) provides master data management (MDM) capabilities that help provide customers with a single authoritative data source to ensure the integrity of the data they use to make decisions. MDS includes an any-domain hub, a set of services, and an interface that enables organizations to manage important data assets for both line-of-business and analytic applications. MDS is a SQL Server database application, a Windows Communication Foundation (WCF) Services application, and an ASPX application that includes the following:

- ~~Master Data Hub~~ for central storage, authoritative source, versioning, rules, and transactions.
- ~~Stewardship Portal~~ for model management, documentation, workflow, and integration.

MDS includes protocols that communicate between the MDS application and the MDS web user interface [MS-SSMDSWS], and between the MDS application and external applications (see [MS-SSMDSWS] [MS-SSMDSWS-15], as shown in the following figure). The

MDS uses the Tabular Data Stream (TDS) protocol is used [MS-TDS] to communicate with the Database Engine.

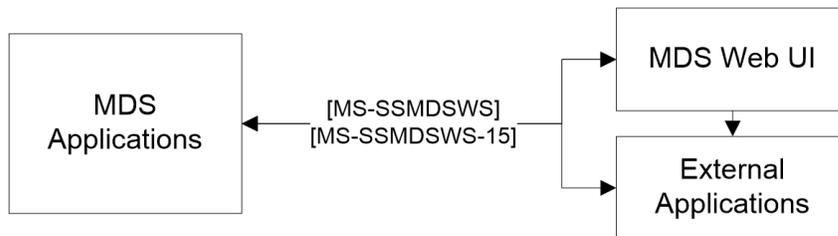


Figure 33: MDS architecture

2.1.3 Reporting Services

2.1.3 Reporting Services

SQL Server Reporting Services (SSRS) [MSDN-SSRS] is a server-based reporting platform that provides comprehensive reporting functionality for a variety of data sources. It includes a complete set of tools for creating, managing, and delivering reports and APIs that enable developers to integrate or extend data and report processing in custom applications. Reporting Services tools work within the Visual Studio environment and are fully integrated with SQL Server tools and components.

The **report server** is available by default with a native portal (, called the Report Manager) Portal, or it can be integrated with an external portal. See the following figures for a view of each architecture.

Figure 4: Reporting Services architecture with native management tools

In Native mode, the Report Designer, Report Manager report designers, report portals, and any other report server management tools communicate with the report server by using the protocols and formats that are specified in [MS-RSWSRM2005RDL], [MS-RSREST], [MS-RSWSRM2010], and [MS-RDLRSWSRM2005]. The Report Viewer control uses tools use the protocols specified in [MS-RPL] or [MS-RGDI] and [MS-RSREST], [MS-RSWSRE2005], and [MS-RGDI] or [MS-RPL] to communicate with the report server.

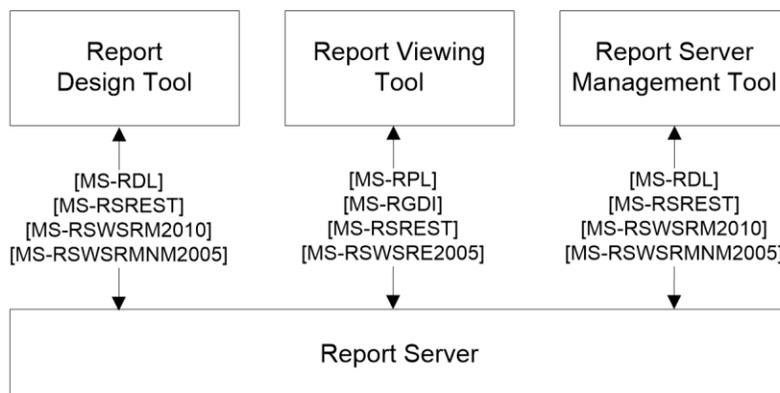


Figure 45: Reporting Services architecture when integrated with an external portal native management tools

When integrated with an external portal, ~~the Report Designer~~ report designers and any report server management tools communicate with the report server portal via protocols and formats specified in [MS-RDL], [MS-RSWSRM2010], [MS-RSWSRMSM2006], ~~[MS-RSWSRM2010]~~, and [MS-RSWSSFA]. The Report Viewer Web Part communicates with the report server by using the protocols and formats that are specified in [MS-RSWSRE2005] and [MS-RPLRGL] or [MS-RGLRPL]. The portal ~~simply~~ redirects all requests to the report server.

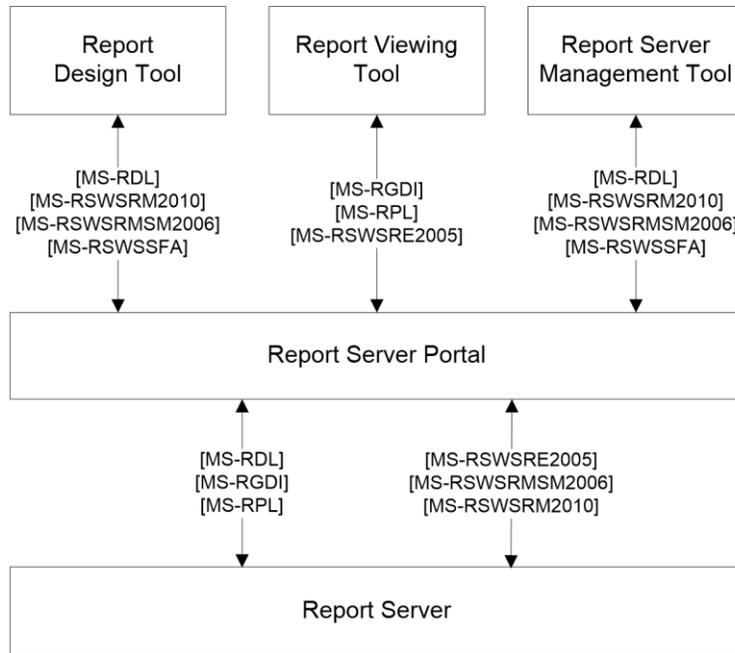


Figure 5: Reporting Services architecture when integrated with an external portal

The report server uses the Tabular Data Stream (TDS) protocol [MS-TDS] to communicate with the Database Engine.

The Report Definition Language [MS-RDL] is used as a payload when setting the definition of a report for execution in the ReportExecution2005 web service [MS-RSWSRE2005]. It is also used as a payload when setting or retrieving the definition of a report for the ReportService2010 web service [MS-RSWSRM2010], the ReportService2005 web service [MS-RSWSRMNM2005], or the ReportService2006 web service [MS-RSWSRMSM2006].

Remote GDI+ [MS-RGL] and Report Page Layout [MS-RPL] are binary stream formats that are used during the communication between the Report Viewer and the report server.

2.1.4 Analysis Services

2.1.4 Analysis Services-Analysis Services

~~SQL Server Analysis Services (SSAS) enables business intelligence (BI) applications to analyze perform complex and high performance analytics on Multidimensional and Tabular data via online analytical processing (OLAP) and models. The data mining techniques. OLAP enables the design, creation, and management of cubes that contain detail and aggregated data from multiple data sources such as relational databases. Cubes models can be enriched with business logic by using Multidimensional Expressions (MDX) or Data Analysis Expressions (DAX) calculations, and. Additionally, they can expose a unified dimensional conceptual model that BI applications can query by using the MDX language and DAX languages. Data mining enables APIs enable the creation, management, and~~

exploration of data mining models. BI applications can run prediction queries on these models by using the Data Mining Extensions (DMX) language.

The SQL Server Analysis Services ~~protocol~~ [MS-SSAS] ~~provides~~ and SQL Server Analysis Services Tabular [MS-SSAS-T] protocols provide methods for a client to communicate with, and perform operations on, an analysis server ~~(see, as shown in the following figure).~~ ~~This protocol is.~~ These protocols are based on **SOAP** and XML for Analysis (XMLA). ~~This protocol supports~~ and use binary XML [MS-BINXML] and OLE DB connection string [MS-OLEDBSTR] formats. The SSAS protocols support TCP/IP as an underlying transport mechanism in addition to HTTP/HTTPS.

~~The SQL Server Analysis Services protocol defines~~ The SSAS protocols define the **Authenticate**, **Discover**, and **Execute** operations-:

- **Authenticate** is used by the client and server to exchange UTF-8 [RFC2279] encoded security token data blocks as part of the authentication process.
- **Discover** is used to obtain information from an analysis server, such as a list of catalogs on a server. Properties are used to control what data is obtained. This generic interface and the use of properties allow for extensibility without the need to rewrite existing functions.
- **Execute** is used to execute commands against a particular analysis server, optionally returning a result set in either tabular or multidimensional form.

Additionally, by using the Analysis Services Usage Reporting protocol [MS-ASUR], external applications can load Analysis Services models from host servers and then load them onto servers that are running Analysis Services. The host server can then receive information from Analysis Services about how the models are used and what machine resources these models use. This information helps administrators of the host servers to optimize these models.

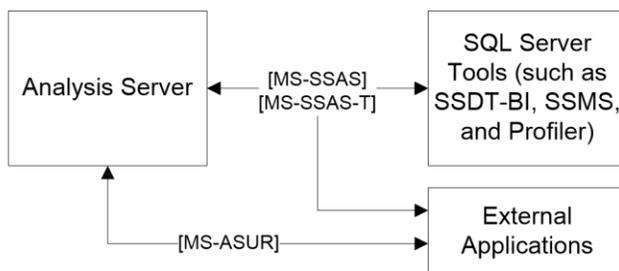


Figure 66: Analysis Services architecture

2.1.5 Database Engine

2.1.5 Database Engine

The Database Engine is the core service for storing, processing, and securing data. The Database Engine provides controlled access and rapid transaction processing to meet the requirements of data-consuming applications within an enterprise.

The Database Engine is used to create relational databases for online transaction processing (OLTP) or online analytical processing data. This includes creating tables for storing data and database objects such as indexes, views, and stored procedures for viewing, managing, and securing data. SQL Server Management Studio can be used to manage the database objects, and SQL Server Profiler can be used for capturing server events.

The Database Engine communicates with its client access libraries (such as Open Database Connectivity (ODBC), **OLE DB**, or ADO.NET) via the Tabular Data Stream (TDS) protocol [MS-TDS], which transports binary XML [MS-BINXML] and the system-provided and user-defined SQL Server CLR

types, as specified in [MS-SSCLRT]. The client access libraries are used by the database applications to communicate with the Database Engine.

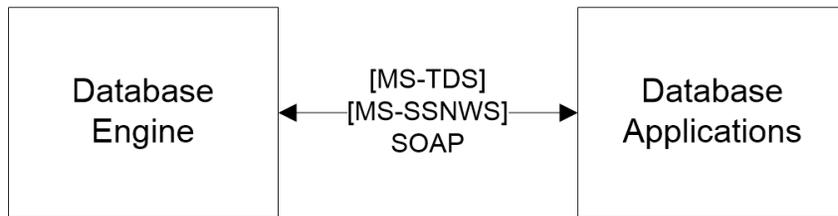


Figure 77: Database Engine architecture

2.1.6—Complex Event Processing Engine

2.1.6 Complex Event Processing Engine

The SQL Server Platform includes a Complex Event Processing (CEP) Engine. This is a separate engine with no dependencies on SQL Server and its other components (such as Reporting Services, Analysis Services, and the Database Engine). Client applications can communicate with the CEP Engine via web services for manageability, as shown in the following figure. These client applications may also include database applications that are built on SQL Server.

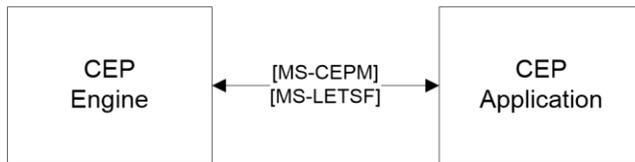


Figure 88: CEP Engine architecture

The client-side CEP library communicates to the server by using the Complex Event Processing Engine Manageability (CEPM) protocol [MS-CEPM]. The CEPM protocol uses the LINQ Expression Tree serialization format [MS-LETSF] to communicate expressions from client to server.

2.1.7—Manageability

2.1.7 Manageability

Manageability is part of the Database Engine and includes the Database Publishing Wizard Protocol [MS-SSDPWP]. This protocol enables a user to publish an existing database to a remote server via a web service. This enables database deployment in hosted scenarios without requiring direct access to the database server, as shown in the following figure.

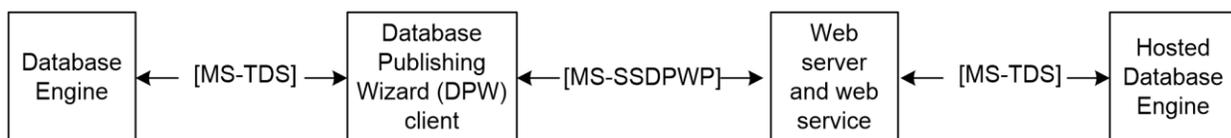


Figure 99: Manageability architecture

2.2 Protocol Summary

2.2 Protocol Summary

The tables in the following sections provide a comprehensive list of the member protocols of the SQL Server system. Member protocols are grouped according to their primary purpose.

2.2.1 Network Connectivity and Application Development

2.2.1 Network Connectivity and Application Development

The following protocols enable communication between the browser, an application, and the Database Engine.

Protocol name	Description	Reference
Native Web Services protocol	This protocol is an application layer request/response protocol that facilitates interaction with a database server; it leverages the standard SOAP 1.1 and SOAP 1.2 protocols to provide specific communication logic and a message format that enables ad hoc Transact-SQL query requests and subsequent query result responses.	[MS-SSNWS]
Tabular Data Stream (TDS) version 4.2 protocol	This protocol is an application-level protocol that is used to transfer Transact-SQL requests and responses between clients and database products. The TDS 4.2 protocol provides for: <ul style="list-style-type: none">▪ Authentication and channel encryption negotiation.▪ Specification of requests in SQL (including bulk insert).▪ Remote procedure calls (RPCs).▪ Return of data.▪ Transaction manager requests.	[MS-SSTDS]
Session Multiplex protocol (SMUX)	This protocol is used between clients and database servers to multiplex database communication sessions over a single reliable transport connection.	[MC-SMP]
SQL Server Resolution Protocol (SSRP)	This protocol is used by clients to locate a named database server instance and to enumerate available database server instances.	[MC-SQLR]
Tabular Data Stream (TDS) protocol	This protocol is an application-level protocol that is used to transfer requests and responses between clients and database server systems. After the connection is established using a transport-level protocol, TDS messages are used to communicate between the client and the server. A database server can also act as the client if needed, in which case a separate TDS connection must be established.	[MS-TDS]

The following formats are used in application development.

Format	Description	Reference
Dataset DiffGram structure	This structure is used to represent the results of a dataset web service call. The DiffGram structure is useful for serializing schema and data for transmission over a network; it can be used to encapsulate both the schema and the data of the dataset.	[MS-DSDG]

Format	Description	Reference
SharePoint Web Services: DataSet DiffGram structure	The DataSet DiffGram DataSetDiffGram web service is the subset of the DiffGram structure that is used by the ADO.NET dataset (the ADO.NET dataset is used by the SharePoint Search service to represent the results of a SharePoint Search service web service call). This protocol supports the wire format of the dataset as returned by Enterprise Search in Microsoft Office SharePoint Server 2007.	[MS-DSDIFFGRAM]
SQL Server binary XML structure	Binary XML is a binary format that is used to encode the text form of an XML document into an equivalent binary form, which can be parsed and generated more efficiently. The format provides full fidelity to the original XML document.	[MS-BINXML]
ODBC connection string structure	The reference document describes the format of connection strings that are used by Open Database Connectivity (ODBC) applications. A connection string is a string that specifies information about a data source and the means of connecting to it. The ODBC application determines how to read the connection string to initiate a connection to a data source.	[MS-ODBCSTR]
OLEDB connection string structure	The reference document describes the format of connection strings that are used by OLE DB consumers . A connection string is a string that is sent from an OLE DB consumer to an OLE DB provider and that specifies the information that is needed to establish a connection to a data source.	[MS-OLEDBSTR]

~~2.2.2 Master Data Services~~

2.2.2 Master Data Services

The following protocols are used by Master Data Services (MDS).

Protocol	Description	Reference
Master Data Services web service	This protocol is used when managing or editing any data or containers for data within the Master Data Services (MDS) system. It encapsulates all of the MDS functionality that is exposed to the user. The framework ensures that the internal functions of the product are better modularized in support of both an API and modular component development. "Services" means a modular architecture based on the Windows Communication Foundation (WCF).	[MS-SSMDSWS]

~~2.2.3 Reporting Services~~

Master Data Services web service 15	This protocol updates the web services implementation of MDS [MS-SSMDSWS] for use with SQL Server 2016.	[MS-SSMDSWS-15]
---	---	---------------------------------

2.2.3 Reporting Services

The following protocols and formats are used by the Reporting Services [MSDN-SSRS].

Format	Description	Reference
Report Definition Language file	SQL Server Report Definition Language (RDL) is a file type that is used to represent the metadata for	[MS-RDL]

Format	Description	Reference
format	defining a report.	
Report Page Layout (RPL) binary stream format	RPL is a binary format that is used by SQL Server Reporting Services when it communicates with viewer controls to offload some of the rendering work from the server to the client viewer control. By using RPL, implementers can create custom report designers that will create RPL, as well as custom report renderers that process and display RPL to display reports.	[MS-RPL]
Remote GDI+ (RGDI) binary stream format	RGDI is a binary format that is produced by SQL Server Reporting Services when it communicates with viewer controls to offload some of the rendering work from the server to the client viewer control. By using RGDI, the implementer can create custom report designers that will generate RGDI, and can create custom report renderers that process and display RGDI to display reports. A client control that consumes RGDI must translate RGDI content to GDI+ objects and calls. RGDI works with only one page of report data at a time; each page is represented by an RGDI stream.	[MS-RGDI]
Report Server Web Service for Report Management: ReportService2010	This protocol is used for managing objects and settings on all report servers, starting with Microsoft SQL Server 2008 R2.	[MS-RSWSRM2010]
Report Server Web Service for Report Management for SharePoint Mode: ReportService2006	This protocol is used for managing objects and settings on a report server that is configured for SharePoint integrated mode.	[MS-RSWSRMSM2006]
Report Server Web Service for Report Execution: ReportExecution2005	This API protocol is provided by the ReportService2005 web service for managing objects and settings on a report server that is configured for SharePoint integrated mode.	[MS-RSWSRE2005]
Report Server Web Service for Report Management Native Mode: ReportService2005	This protocol is provided by the ReportService2005 web service for managing objects and settings on a report server that is configured for native integrated mode.	[MS-RSWSRMNM2005]
Report Server Web Service for SharePoint Forms Authentication ReportServiceAuthentication	This API protocol is provided by the ReportService2006 web service for managing objects and settings on a report server that is configured for SharePoint integrated mode.	[MS-RSWSSFA]

2.2.4 Analysis Services

Reporting Services REST API protocol	This RESTful API specifies an HTTP-based web service API to manage objects and settings on a report server that is configured for native integrated mode.	[MS-RSREST]
--	---	-------------

2.2.4 Analysis Services

The following protocols are used by Analysis Services.

Protocol	Description	Reference
Analysis Services Usage Reporting protocol	This protocol specifies a method by which a client application, that gathers Analysis Services models from a host server and then loads them onto other servers that are running Analysis Services, can report back to that host server with the details about how those models are being used and the resources those models consume on the other servers.	[MS-ASUR]
SQL Server Analysis Services protocol	This protocol provides a mechanism for a client to communicate with and perform operations on an analysis server.	[MS-SSAS]
SQL Server Analysis Services Server Tabular protocol	This protocol provides a mechanism that extends the SQL Services Analysis Services protocol [MS-SSAS] by specifying the methods for a client to communicate with, and perform operations on, an analysis server. This protocol is for Microsoft SQL Server 2005, Microsoft SQL Server 2008, Microsoft SQL Server 2008 R2, Microsoft SQL Server 2012, and Microsoft SQL Server 2014 that uses Tabular databases that are at compatibility level 1200 or higher.	[MS-SSAS-T]
SQL Server Analysis Services 8.0 protocol	This protocol provides a mechanism for a client to communicate with, and perform operations on, an online analytical processing (OLAP) server. This protocol is for Microsoft SQL Server 7.0 and Microsoft SQL Server 2000. This legacy protocol is superseded by [MS-SSAS].	[MS-SSAS8]

2.2.5 Database Engine

2.2.5 Database Engine

The following protocol is used with the Database Engine.

Format	Description	Reference
SQL Server Common Language Runtime (CLR) Types structure	<p>This binary format consists of the GEOGRAPHY, GEOMETRY, HIERARCHYID, and common language runtime (CLR) user-defined type (CLR-UDT) structures managed by SQL Server.</p> <p>The structures used to transmit geography and geometry data types over the wire implement the Open Geospatial Consortium's (OGC) OpenGIS Simple Features Specification (SFS). SQL Server, therefore, provides data to a client program as text or binary representations of points, lines, polygons, and collections that conform to the specification.</p> <p>The hierarchyid data type enables SQL Server applications to store, retrieve, and manipulate hierarchical data.</p>	[MS-SSCLRT]

2.2.6 CEP Engine

2.2.6 CEP Engine

The following protocol is used with the Complex Event Processing (CEP) Engine.

Protocol	Description	Reference
Complex Event Processing Engine Manageability protocol	Complex event processing (CEP) is the continuous and incremental processing of event (data) streams from multiple sources based on declarative query and pattern specifications with near-zero latency. The	[MS-CEPM]

Protocol	Description	Reference
	CEP Engine provides a dedicated web service to handle requests for managing the system.	
LINQ Expression Tree serialization format	An XML serialization format for arbitrary LINQ expressions. This is used by the CEP Engine to communicate logic between client and server.	[MS-LETSF]

~~2.1.22.2.7~~ ~~2.2.7~~ Manageability

The following protocol is used for manageability functionality.

Protocol	Description	Reference
Database Publishing Wizard Protocol	With this protocol, a publishing session can be initiated, data can be published, and scripts can be executed against an instance of SQL Server.	[MS-SSDPWP]

~~2.3~~ Environment

~~2.3~~ Environment

The following sections identify the context in which the system exists. This includes the systems that use the interfaces provided by this system of protocols, other systems that depend on this system, and, as appropriate, the method by which components of the system communicate.

~~2.1.32.3.1~~ ~~2.3.1~~ Dependencies on This System

None.

~~2.1.42.3.2~~ ~~2.3.2~~ Dependencies on Other Systems or Components

None.

~~2.1.52.3.3~~ ~~2.3.3~~ Communications within the System

Communications within the system refers to protocols that are externally visible. All of these are documented in the previous sections. The servers that make up the system—Analysis Services, Reporting Services, MDS, the Database Engine, and the Complex Event Processing (CEP) Engine—use these protocols for communication.

~~2.1.62.3.4~~ ~~2.3.4~~ Assumptions and Preconditions

This section briefly documents the assumptions and preconditions that are required by the system. The scope of this discussion is intended to be implementation-independent and is limited to the system level.

The servers running SQL Server are reachable by external clients via an established IP address or IP addresses.

The functional components of the servers running SQL Server are started collectively and the servers accept client requests.

The SQL Server servers (Reporting Services, Analysis Services, MDS, and the Database Engine) are matching versions or are within an acceptable range of versions. For more information about versioning, see section 2.5.

When **Active Directory** is used to provide authentication, the directory service is accessible to the server running SQL Server. Any intermediate firewalls, routers, or connection points between components of the system have all required ports and gateways open for communication between them.

~~2.2.4.2.4~~ Use Cases

~~2.2.1.2.4.1~~ ~~2.4.1~~ Network Connectivity and Application Development Use Cases

~~2.2.1.1.2.4.1.1~~ ~~2.4.1.1~~ SQL Server Instance Discovery Use Case

This use case describes how an instance of SQL Server is discovered in the local network. The actors are the application and the SQL Server Browser.

Actions

1. ~~1.~~—A database application broadcasts an SSRP [MC-SQLR] message (UDP packet).
2. ~~2.~~—Each SQL Server Browser service that receives the message responds with the instances of SQL Server (another UDP packet) on its computer. The database application now has a list of instances of SQL Server to which it can connect.

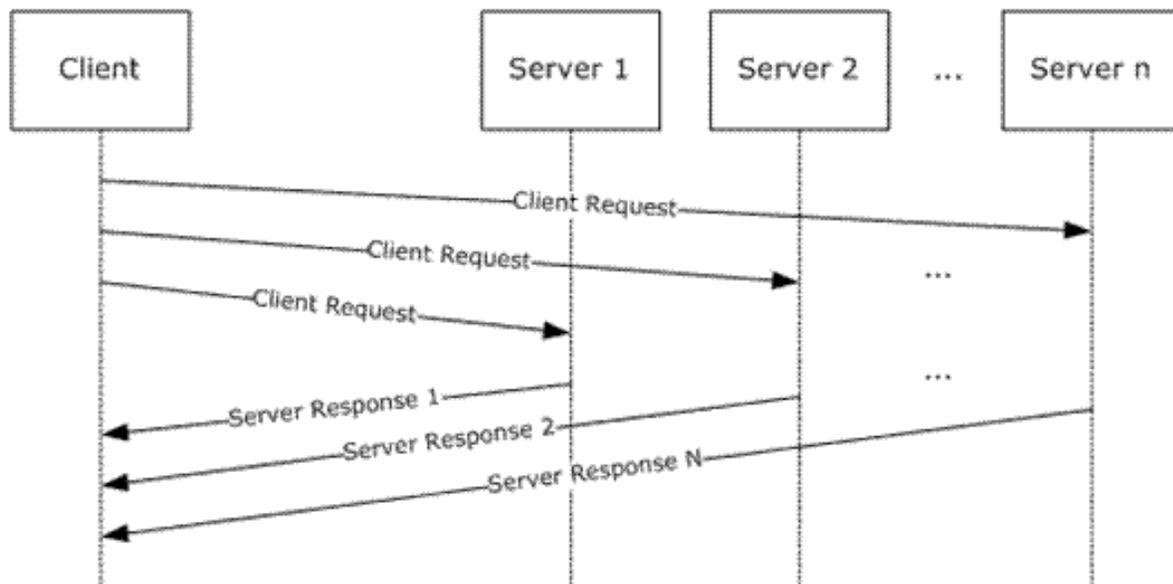


Figure 1010: SQL Server instance discovery use case

~~2.2.1.2.2.4.1.2~~ ~~2.4.1.2~~ Named SQL Server Instance Resolution/Enumeration

This use case describes how the connectivity protocol details of a named instance of SQL Server are discovered. The actors are the application and the SQL Server Browser.

Actions

1. ~~1.~~—A database application sends an SSRP [MC-SQLR] message to the SQL Server Browser service with the name of the desired instance of SQL Server.
2. ~~2.~~—The SQL Server Browser responds either with protocol details that specify where the instance of SQL Server is listening or with an error indicating that there is no such named instance of SQL Server.
3. ~~3.~~—The database application has a list of instances of SQL Server to which it can connect.

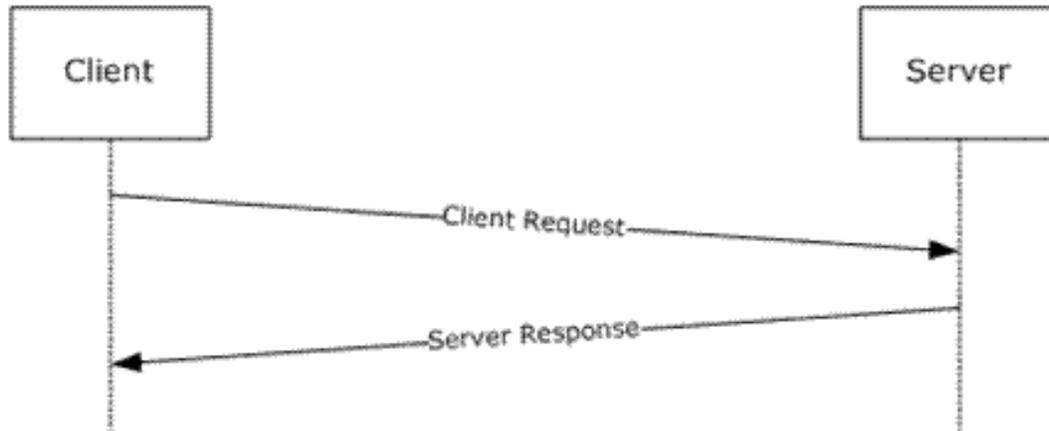


Figure 11111: Named SQL Server instance resolution use case

~~2.2.1.3~~~~2.4.1.3~~ ~~2.4.1.3~~ Client Connection (TDS, SSTDS, or SSNWS))

This use case describes how to establish a connection and to execute commands to exchange data or to produce side effects. The actors are the database application and SQL Server.

Actions

1. ~~1.~~—A database application engages in an authentication handshake with a desired authentication scheme (SQL Server or Windows).
2. ~~2.~~—SQL Server verifies the database application's credentials and either confirms that the connection was established or terminates the connection if authentication fails.
3. ~~3.~~—The database application sends a command.
4. ~~4.~~—SQL Server responds with the execution status and, eventually, data if the command produces a result. (The last two steps may be repeated.)
5. ~~5.~~—The database application terminates the connection.
6. ~~6.~~—The database application may have caused side effects by executing commands and/or may have exchanged data with SQL Server.

For Tabular Data Stream (TDS) only: If the database application requires the use of Multiple Active Result Sets (MARS), the Session Multiplex Protocol (SMP) is used underneath for virtual connection multiplexing.

For SOAP only: This use case has been deprecated in Microsoft SQL Server 2008.

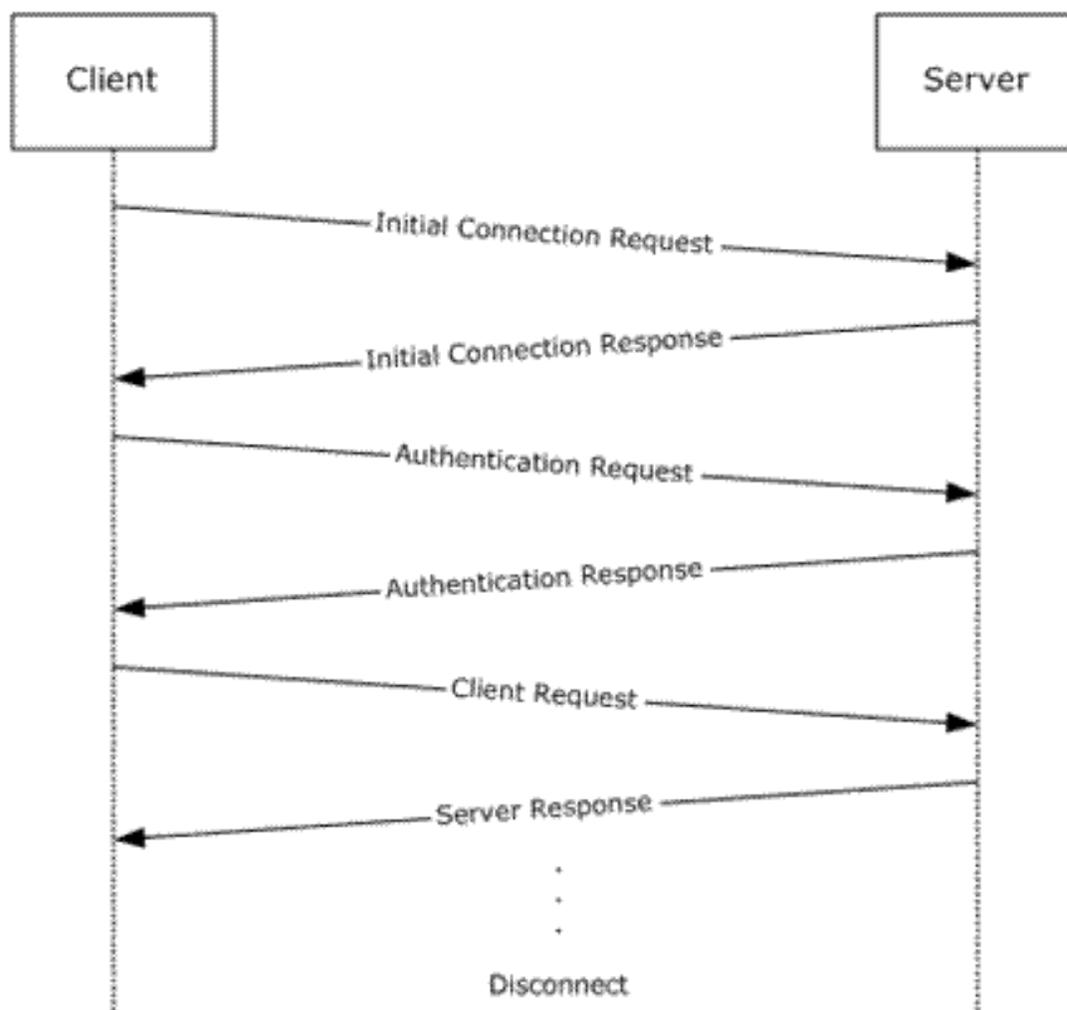


Figure 12-2: Client connection use case

Payloads

Payloads and connection strings are carried on the protocols, as follows:

- Binary XML type values, as specified in [MS-BINXML] are transported by the Tabular Data Stream (TDS) protocol, as specified in [MS-TDS].
- SQL Server CLR types specified in [MS-SSCLRT] are transported by the TDS protocol.
- The **DataSet DiffGram** structure types specified in [MS-DSDG] and [MS-DSDIFFGRAM] are carried by a generic (or standard) SOAP protocol.
- Open Database Connectivity (ODBC) and OLE DB connection string types specified in [MS-ODBCSTR] and [MS-OLEDBSTR] are carried by a generic SOAP.

~~2.2.22.4.2~~ ~~2.4.2~~ MDS Integration Use Cases

~~2.2.2.12.4.2.1~~ ~~2.4.2.1~~ Use the MDS UI to Query

This use case describes how to perform the **Create**, **Read Update**, and **Delete Object** operations within the MDS store. The actors are the MDS web user interface and the external application. Note that security authorization to the target object with the Master Data Services web service protocol [MS-SSMDSWS] [[MS-SSMDSWS-15](#)] is required.

Actions

1. ~~1.~~—The MDS web UI provides a Master Data Services web service protocol request message that specifies the object or objects to modify or query.
2. ~~2.~~—The application modifies or returns these objects in a response message.

~~2.2.2.22.4.2.2~~ ~~2.4.2.2~~ Query a List from the MDS Store

Actions

1. ~~1.~~—Using the **EntityMembersGet** operation, the user forms a request that describes the context of the data desired and the criteria to retrieve it.
2. ~~2.~~—The user submits the request message.
3. ~~3.~~—The requesting client's security permissions are evaluated, and if authorization is successful, the data is returned in the response message.
4. ~~4.~~—If the user is unauthorized, the user is returned an empty result set and an error message detailing the security required for access.
5. ~~5.~~—The valid result set is formatted according to the criteria provided in the request message.

~~2.2.32.4.3~~ ~~2.4.3~~ Reporting Services Use Cases

~~2.2.3.12.4.3.1~~ ~~2.4.3.1~~ Report Authoring, Management, and Viewing with Native Report Portal

Actions

1. ~~1.~~—Within a report authoring tool, a report author designs a report and saves it in RDL file format, as specified in [MS-RDL].
2. ~~2.~~—The authoring tool publishes the saved report to a report server via methods of the ReportService2010 API, as specified in [MS-RSWSRM2010].
3. ~~3.~~—Within the report server management tool, the report server administrator manages the reports, resources, schedules, subscriptions, and users within the report catalog.
4. ~~4.~~—Each management operation performed by the administrator is implemented as an API call from the management tool to the ReportService2010 API.
5. ~~5.~~—Administrators can publish reports in RDL format via these APIs.
6. ~~6.~~—Within a report viewing tool, a report consumer specifies a report to execute from within the report server catalog.

- ~~7.~~ ~~7.~~—The report viewer passes this instruction to the report server via the ReportExecution2005 API, as specified in [MS-RSWSRE2005].
- ~~8.~~ ~~8.~~—The report server returns the results of the report execution to the report viewer as either Report Page Layout, as specified in [MS-RPL] or a Remote GDI+, as specified in [MS-RGDI], depending on which was requested by the report viewer. Note that other standard formats such as HTML, XML, and PDF may be requested and returned instead.

~~2.2.3-2.2.4.3.2~~ ~~2.4.3.2~~ **Mobile Report Authoring, Management, and Viewing with External Native Report Portal**

Actions

- ~~1.~~ ~~1.~~—Within a report authoring tool, a report author designs a mobile report and publishes it to a server by using the Reporting Services RESTful API, as specified in [MS-RSREST].
- ~~2.~~ ~~2.~~ By using a report server management tool, the report server administrator manages the reports, schedules, and users within the report catalog.
- ~~3.~~ ~~3.~~ Each management operation performed by the administrator is implemented as an API call from the management tool to the ReportService2010 API, as specified in [MS-RSWSRM2010].
- ~~4.~~ ~~4.~~ By using a report viewing tool, a report consumer specifies a report to execute from within the report server catalog.
- ~~5.~~ ~~5.~~ The report viewing tool passes this instruction to the report server via the Reporting Services RESTful API.
- ~~6.~~ ~~6.~~ The report server returns the results of the report execution to the report viewer via the Reporting Services RESTful API.

2.4.3.3 Report Authoring, Management, and Viewing with External Report Portal

Actions

1. Within a report authoring tool, a report author designs a report and saves it in RDL file format, as specified in [MS-RDL].
- ~~2.~~ ~~2.~~—The authoring tool authenticates the user against the report server portal via the ReportServiceAuthentication API, as specified in [MS-RSWSSFA], and publishes the saved report to a report server portal via the methods of the ReportService2010 API, as specified in [MS-RSWSRM2010].
- ~~3.~~ ~~3.~~—Calls to ReportService2010 are either individually redirected to the report server by the report server portal or are proxied to the report server via the ReportServiceAuthentication API.
- ~~4.~~ ~~4.~~—Within the report server management tool, the report server administrator manages the reports, resources, schedules, subscriptions, and users within the report catalog. The management tool authenticates the administrator against the report server portal via the ReportServiceAuthentication API.
- ~~5.~~ ~~5.~~—Each management operation performed by the administrator is implemented as an API call from the management tool to the ReportService2010 API.
- ~~6.~~ ~~6.~~—Calls to both ReportServiceAuthentication and ReportService2010 are either individually redirected to the report server by the report server portal or are proxied to the report server via ReportServiceAuthentication. Reports in the RDL format can be published by the administrator via this API.

7. ~~7.~~—Within a report viewing tool, a report consumer specifies a report to execute from within the report server catalog. The report viewer passes this instruction to the report server portal via the ReportExecution2005 API, as specified in [MS-RSWSRE2005], and it is either individually redirected to the report server by the report server portal or is proxied to the report server via the ReportServiceAuthentication API.
8. ~~8.~~—The report server returns the results of the report execution to the report viewer as either Report Page Layout [MS-RPL] or Remote GDI+ [MS-RGDI], depending on which was requested by the report viewer. Note that other standard formats such as HTML, XML, and PDF may be requested and returned instead.

~~2.4.4~~ **Analysis Services Use Cases**

2.4.4 Analysis Services Use Cases

The following use cases show how to authenticate, discover, and execute a request.

~~2.2.3.3~~2.4.4.1 ~~2.4.4.1~~ **Authentication with the Analysis Server**

This use case describes how a client connects and authenticates itself with an **analysis server**.

Actions

1. ~~1.~~—The client establishes a **TCP** connection to the server.
2. ~~2.~~—The client sends an **Authenticate** request that contains an SSPI security token.
3. ~~3.~~—The server returns an **AuthenticateResponse** response containing an SSPI security token.
4. ~~4.~~—Steps 2 and 3 are repeated as necessary to complete the authentication as required by the SSPI provider.

~~2.2.3.4~~2.4.4.2 ~~2.4.4.2~~ **Information Discovery**

This use case describes how a client discovers information about databases on an analysis server.

Actions

1. ~~1.~~—The client sends a **Discover** request that has the `MDSCHHEMA``DBSCHEMA` `CATALOGS` request type to retrieve the list of databases.
2. ~~2.~~—The server responds with a rowset that contains the list of databases and some properties associated with each database.

~~2.4.4.3~~ **Sending a Query**

2.4.4.3 Sending an MDX Query

This use case describes how a client sends an MDX query to a `cube`~~`cube`~~ `data model` on an analysis server.

Actions

1. ~~1.~~—The client sends an **Execute** request containing an MDX query to a cube on the analysis server.
2. ~~2.~~—The server responds with a multidimensional dataset that contains the query result.

~~2.4.4.4~~ ~~2.4.5~~ **2.4.5—Sending a DAX Query**

This use case describes how a client sends an DAX query to a data model on an analysis server.

Actions

1. The client sends an **Execute** request containing a DAX query to a data model on the analysis server.
2. The server responds with a tabular dataset that contains the query result.

2.4.4.5 Usage Reporting

This use case describes how a client receives information about model usage from an analysis server.

Actions

1. The client sends a SOAP request to the Analysis Services server that includes a WSDL operation that is defined by usage reporting.
2. The server responds with information about the model. The values in the response are models or handles that are used by other WSDL operations.

~~2.2.4.2~~ ~~2.4.5~~ **2.4.5 Database Engine Use Cases**

~~2.2.4.1~~ ~~2.4.5.1~~ **2.4.5.1—Authentication with the Database Engine**

This use case describes how a client connects and authenticates itself with the Database Engine.

Actions

1. ~~1.~~—The client establishes a connection to SQL Server by using one of the protocols in the client access library.
2. ~~2.~~—The client sends an **Authenticate** request that contains an SSPI security token.
3. ~~3.~~—The server returns an **AuthenticateResponse** response that contains an SSPI security token.
4. ~~4.~~—Steps 2 and 3 are repeated as necessary to complete the authentication as required by the SSPI provider.

~~2.2.4.2~~ ~~2.4.5.2~~ **2.4.5.2—Information Discovery**

This use case describes how a client discovers information on the Database Engine by using one of the protocols in the client access library.

Actions

1. ~~1.~~—The client sends a **Discover** request to retrieve the list of databases.
2. ~~2.~~—The server responds with a rowset that contains the list of databases and some properties that are associated with each database.

~~2.2.4.3~~ ~~2.4.5.3~~ **2.4.5.3—Sending a Query**

This use case describes how a client sends an SQL query to the Database Engine by using one of the protocols in the client access library.

Actions

1. ~~1.~~—The client sends an **Execute** request that contains an SQL query to the Database Engine.
2. ~~2.~~—The server responds with a rowset that contains the results of the SQL query.

Payloads

- ~~•~~—CLR-type data, as specified in [MS-SSCLRT] are transported by the Tabular Data Stream (TDS) protocol, as specified in [MS-TDS].

~~2.4.6~~ ~~CEP Engine Use Case~~

2.4.6 CEP Engine Use Case

The Complex Event Processing Engine Manageability (CEPM) protocol, as specified in [MS-CEPM], is a web service protocol that defines the communication protocol between a client application and a complex event processing (CEP) server. Using this protocol, a client application can create metadata objects on a CEP server, start and stop queries, and query about the CEP system state. The CEPM protocol is stateless. All communication is initiated by the client. The server sends responses only in response to messages received.

The client and server use the LINQ Expression Tree serialization format, as specified in [MS-LETSF], to transfer expression logic between each other.

Actions

1. ~~1.~~—A protocol message to start the query is sent.
2. ~~2.~~—The message causes the CEP Engine to tap into the streaming data.
3. ~~3.~~—The engine calculates and sends output data.
4. ~~4.~~—Another message stops the engine from computing data.

~~2.4.7~~ ~~Manageability Use Case~~

2.4.7 Manageability Use Case

The following is an example procedure in which a client uses the Database Publishing Wizard Protocol to create a simple database and then populate it with data. Note that an appropriate server connection and user credentials are required.

Actions

1. ~~1.~~—The client invokes the **BeginPublish** operation together with the appropriate server connection and user credentials.
2. ~~2.~~—The client invokes the **PublishScript** operation with a **Transact-SQL** script, which creates the new database and the database objects.
3. ~~3.~~—The client invokes the **EndPublish** operation to finish the publishing session and to release server resources.

~~2.32.5 2.5~~ ~~Versioning, Capability Negotiation, and Extensibility~~

There are no versioning, capability negotiation, or extensibility considerations.

~~2.6—Error Handling~~

2.6 Error Handling

There are no system-level error-handling behaviors. In general, for errors returned as part of a protocol in SQL Server, the protocol documents describe what the error means for the system when they are defined. How they are handled, based on the protocol description, is an issue for the implementer.

~~2.42.7 2.7—Coherency Requirements~~

SQL Server has no system-level coherency requirements beyond specific details that are covered in the protocol documents.

~~2.8—Security~~

2.8 Security

Security may be handled differently by the different protocols. For detailed information about protocol security, see the protocols that are listed in section 2.2.

3 3—Examples

The examples that follow map to the use cases that are described in section 2.4.

3.1 3.1—Configuring and Administering Multiple Servers

This example shows a user setting up an enterprise system by using authoring and management tools so that all servers can be administered from a central location.

Content for these servers—the analysis server, the report server, and the MDS server—is defined by using authoring tools.

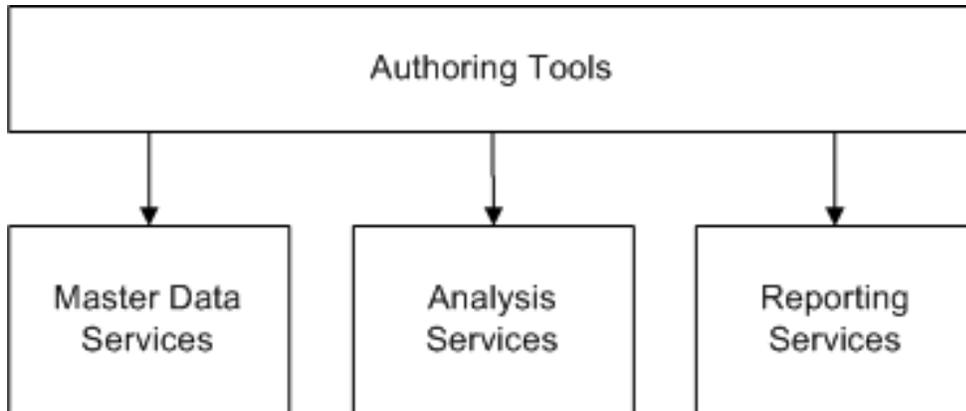


Figure 1313: Defining content for the servers

Management tools are then used to set up the enterprise system.

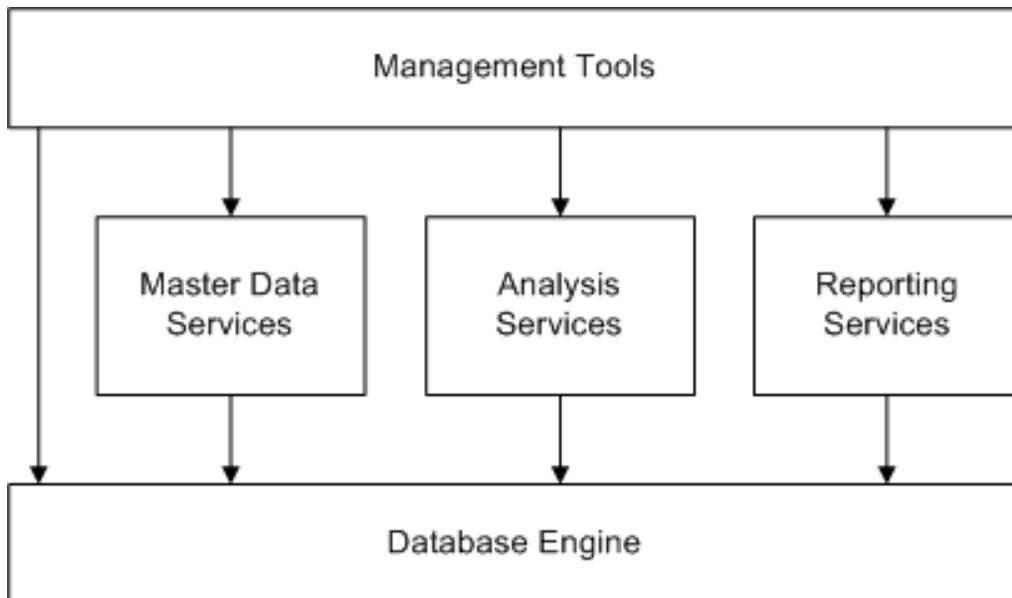


Figure 1414: Using management tools to set up the system

3.1.1 ~~3.1.1~~ Analysis Services Authoring and Management

This example maps to the use cases for Analysis Services in section 2.2.4 and to the figures in section 3.1.

1. ~~1.~~—The IT administrator defines a ~~UDM (such as a data model via a data model authoring tool. The data model can be either a Multidimensional cube that provides or a Tabular model. Both model types can provide~~ a description of which information to retrieve and which transformations to ~~be performed) via a UDM authoring tool perform.~~
2. ~~2.~~—The IT administrator publishes the ~~UDM~~data model to the Analysis Services server.
3. ~~3.~~—With a management tool, the IT administrator directs Analysis Services to process the data.
4. ~~4.~~—The Analysis Services server issues a sequence of queries against the Database Engine.
5. ~~5.~~—The Database Engine returns the data for each query.
6. ~~6.~~—Analysis Services processes and stores the results.
7. ~~7.~~—Analysis Services returns the status to the management tool.

3.1.2 ~~3.1.2~~ Reporting Services Authoring and Management

This example maps to the use cases for Reporting Services in section 2.4.3 and to the figures in section 3.1.

1. ~~1.~~—Using a report authoring tool, the report author defines a report and publishes it to the Reporting Services server.
2. ~~2.~~—The Reporting Services server compiles the report and submits it to the Database Engine for storage.
3. ~~3.~~—The Database Engine returns the status.
4. ~~4.~~—The Reporting Services server then returns the status to the author.
5. ~~5.~~—The Reporting Services server uses Management Studio and other management tools to request a list of reports from the Reporting Services server.
6. ~~6.~~—The Reporting Services server issues a query to get reports.
7. ~~7.~~—The Database Engine returns the results.
8. ~~8.~~—The Reporting Services server returns the results.

3.1.3 ~~3.1.3~~ MDS Management

This example maps to the use cases for Master Data Services (MDS) in section 2.4.2 and to the figures in section 3.1.

1. ~~1.~~—Using an MDS authoring tool, the data steward defines an entity and publishes it to the MDS server.
2. ~~2.~~—The MDS server compiles the entity and submits it to the Database Engine for storage.
3. ~~3.~~—The Database Engine returns the status.
4. ~~4.~~—The MDS server returns the status to the data steward.

5. ~~5.~~—The MDS server uses the MDS portal to request a list of models and entities from the MDS server.
6. ~~6.~~—The MDS server issues a query to get the models and entities.
7. ~~7.~~—The Database Engine returns the results.
8. ~~8.~~—The MDS server returns the results.

3.1.4 ~~3.1.4~~—Database Engine Management

This example maps to the use cases for network connectivity and application development in section 2.4.1 and Database Engine in section 2.4.5 and to the figures in section 3.1.

1. ~~1.~~—Using management tools and SQL Server Management Studio, an administrator attempts to get a list of database instances on the network.
2. ~~2.~~—The management tools broadcasts the request to all computers on the network.
3. ~~3.~~—The SQL Server instances on the network respond.
4. ~~4.~~—The administrator selects a database instance and requests a list of databases on that instance.
5. ~~5.~~—The management tools issue a query to the Database Engine requesting the data that the administrator wants.
6. ~~6.~~—The administrator selects a database instance and requests a list of tables on that instance.
7. ~~7.~~—The management tools issue a query to the Database Engine, requesting the data that the administrator wants.
8. ~~8.~~—A list of tables is returned to the management tool and displayed to the administrator.

3.2 ~~3.2~~—Obtaining Data

This example shows a user consuming data in several forms.

3.2.1 ~~3.2.1~~—Obtaining Data via Analysis Services

The steps for this example are similar to those in [section 3.2.2](#), but a pivot table is published by Microsoft Excel at the Analysis Services server (a pivot table is manipulated and data is retrieved from the Analysis Services server).

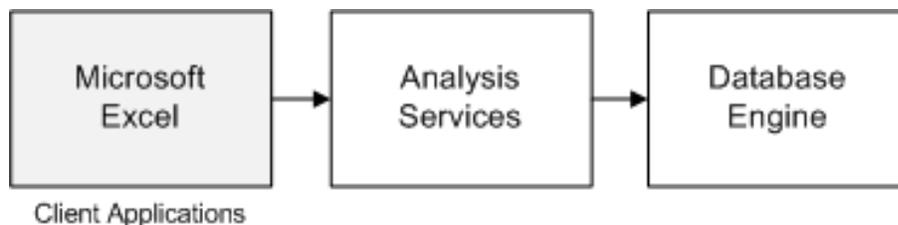


Figure 1515: User obtaining data via Analysis Services

3.2.2 ~~3.2.2~~—Obtaining Data via Reporting Services

1. ~~1.~~—Using Windows Internet Explorer, the user navigates to the SharePoint portal and clicks a report to execute.

1. ~~2.~~—The SharePoint portal, acting as a Reporting Services client, requests that the report be executed by Reporting Services.
2. ~~3.~~—Reporting Services requests the underlying data for the reports from the Database Engine or the Analysis Services Engine.
3. ~~4.~~—The engine returns the data that was processed by Reporting Services.
4. ~~5.~~—Reporting Services returns a representation of the report to SharePoint.
5. ~~6.~~—SharePoint returns the resulting web page to Internet Explorer.

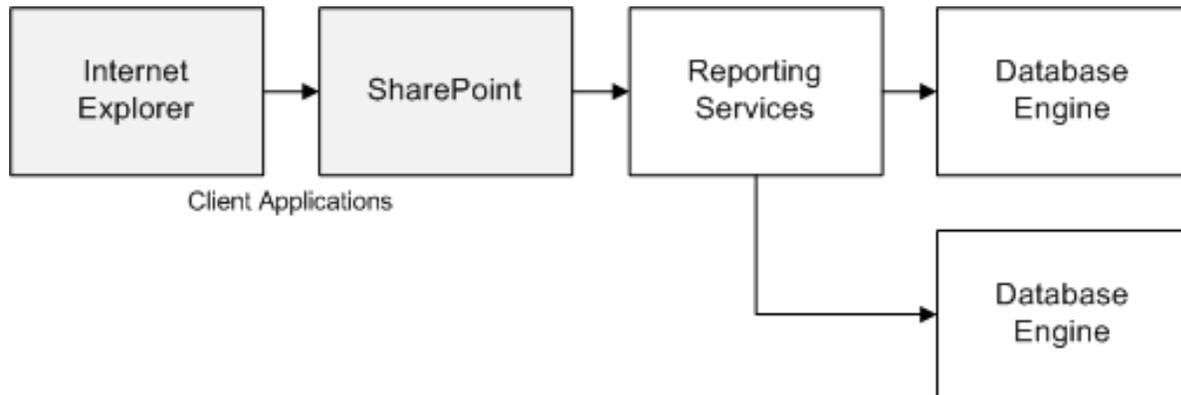


Figure 1616: User obtaining data via Reporting Services

3.2.3 ~~3.2.3~~—Obtaining Data via MDS

1. ~~1.~~—Using Internet Explorer, the user navigates to the MDS portal and clicks an entity to manage.
2. ~~2.~~—MDS requests the underlying data for the reports from the Database Engine.
3. ~~3.~~—The engine returns the data that was processed by MDS.
4. ~~4.~~—MDS returns the data to the MDS portal ~~via XML~~.
5. ~~5.~~—The MDS portal renders the data in Internet Explorer.



Figure 1717: User obtaining data via MDS

4—Microsoft Implementations

4 Microsoft Implementations

There are no variations in the behavior of Microsoft SQL Server in different versions beyond those described in the specifications of the protocols supported by the system, ~~as listed in the Protocol Summary in section 2.2.~~

The information in this specification is applicable to one or more of the following product versions:

- ~~Microsoft~~ Microsoft SQL Server 2005
- ~~Microsoft~~ Microsoft SQL Server 2008
- ~~Microsoft~~ Microsoft SQL Server 2008 R2
- ~~Microsoft~~ Microsoft SQL Server 2012
- ~~Microsoft~~ Microsoft SQL Server 2014
- 5 ~~Microsoft~~ Microsoft SQL Server 2016

4.1 Product Behavior

45 Change Tracking

~~No table of This section identifies changes is available. The that were made to this document is either new or has had no changes since its the last release. Changes are classified as New, Major, Minor, Editorial, or No change.~~

~~6—The revision class **New** means that a new document is being released.~~

~~The revision class **Major** means that the technical content in the document was significantly revised. Major changes affect protocol interoperability or implementation. Examples of major changes are:~~

- ~~▪ A document revision that incorporates changes to interoperability requirements or functionality.~~
- ~~▪ The removal of a document from the documentation set.~~

~~The revision class **Minor** means that the meaning of the technical content was clarified. Minor changes do not affect protocol interoperability or implementation. Examples of minor changes are updates to clarify ambiguity at the sentence, paragraph, or table level.~~

~~The revision class **Editorial** means that the formatting in the technical content was changed. Editorial changes apply to grammatical, formatting, and style issues.~~

~~The revision class **No change** means that no new technical changes were introduced. Minor editorial and formatting changes may have been made, but the technical content of the document is identical to the last released version.~~

~~Major and minor changes can be described further using the following change types:~~

- ~~▪ New content added.~~
- ~~▪ Content updated.~~
- ~~▪ Content removed.~~
- ~~▪ New product behavior note added.~~
- ~~▪ Product behavior note updated.~~
- ~~▪ Product behavior note removed.~~
- ~~▪ New protocol syntax added.~~
- ~~▪ Protocol syntax updated.~~
- ~~▪ Protocol syntax removed.~~
- ~~▪ New content added due to protocol revision.~~
- ~~▪ Content updated due to protocol revision.~~
- ~~▪ Content removed due to protocol revision.~~
- ~~▪ New protocol syntax added due to protocol revision.~~
- ~~▪ Protocol syntax updated due to protocol revision.~~
- ~~▪ Protocol syntax removed due to protocol revision.~~
- ~~▪ Obsolete document removed.~~

~~Editorial changes are always classified with the change type **Editorially updated**.~~

Some important terms used in the change type descriptions are defined as follows:

- **Protocol syntax** refers to data elements (such as packets, structures, enumerations, and methods) as well as interfaces.
- **Protocol revision** refers to changes made to a protocol that affect the bits that are sent over the wire.

The changes made to this document are listed in the following table. For more information, please contact dochelp@microsoft.com.

<u>Section</u>	<u>Tracking number (if applicable) and description</u>	<u>Major change (Y or N)</u>	<u>Change type</u>
<u>1 Introduction</u>	<u>Updated the list of applicable products for Microsoft SQL Server 2016.</u>	<u>Y</u>	<u>Content update.</u>
<u>2.2.4 Analysis Services</u>	<u>Added SQL Server 2016 to list of products applicable to the SSAS protocol.</u>	<u>Y</u>	<u>Content update.</u>
<u>4 Microsoft Implementations</u>	<u>Added SQL Server 2016 to the list of applicable products.</u>	<u>Y</u>	<u>Content update.</u>

56 Index

A

administering servers 32~~28~~
ADO.NET DataSet Diffgram structure 12~~10~~
Analysis Services (section 2.1.1 12~~10~~, section 2.1.4 15~~13~~)
 architecture 15~~13~~
 authentication 28~~25~~
 DAX queries 29
 information discovery 28~~25~~
 management example 33~~28~~
 MDX queries 28~~25~~
 network connectivity 12~~10~~
 obtaining data 34~~30~~
 protocols 20~~18~~
 use cases 28~~25~~
Analysis Services Usage Reporting Protocol
 about 15
Analysis services use cases
 overview 28
Applicable protocols 18
application development
 architecture 12~~10~~
 example 34~~30~~
 protocols 18~~15~~
 use cases 23~~20~~
Architecture 11
Authenticate operation 15~~13~~
authentication
 Analysis Services 28~~25~~
 Database Engine 29~~25~~
authoring reports
 external report portal 27~~24~~
 native report portal (section 2.4.3.1 26, section 2.4.3.2 27~~23~~)

B

binary XML
 application development 12~~10~~
 Database Engine 16~~14~~
 network connectivity 12~~10~~
 protocol summary 18

C

Capability negotiation 30
CEP Engine
 about 17~~15~~
 protocols 21~~19~~
 use case 30~~26~~
Cep engine use case
 overview 30
Change tracking 38~~33~~
client connection use case 24~~21~~
CLR types
 Database Engine 16~~14~~
 reference document 21~~18~~
Coherency requirements 31
Communications 22
 within the system 22
Complex Event Processing Engine Manageability Protocol 21~~19~~
 about 17

[Concepts](#) 11
configuring servers 32~~28~~
[Considerations](#)
[security](#) 31

D

Data Mining Extensions 15~~13~~
Database Engine 12~~10~~
 authentication 29~~25~~
 information discovery 29~~26~~
 management example 34~~30~~
 protocols (section 2.1.1 12~~10~~, section 2.1.5 16~~14~~, section 2.2.5 21~~18~~)
 sending query to 29~~26~~
 use cases 29~~25~~
Database Publishing Wizard Protocol (~~section 2.1.7 15, section 2.2.7 19, section 2.4.7 27~~)
 [about](#) 17
 [Dataset DiffGram structure](#)
 [protocol summary](#) 18
 [DAX queries](#) 29
 [Dependencies](#)
 [within the system](#) 22
 [Design intent](#)
 [analysis services use cases](#) 28
 [cep engine use case](#) 30
 [manageability use case](#) 30
Discover operation 15~~13~~
DMX 15
~~13~~

E

enterprise systems 32~~28~~
[Environment](#) 22~~error~~
[Error handling](#) 31~~27~~
examples
 obtaining data 34~~30~~
 setting up enterprise systems 32~~28~~
Execute operation 15
[Extensibility](#)
 [Microsoft implementations](#) 36
 [overview](#) 30
[External dependencies](#) 22

F

[Functional architecture](#) 11~~13~~
[Functional requirements - overview](#) 12

G

geography data types 21~~18~~
geometry data type 21~~18~~
[Glossary](#) 8

H

handling errors 31~~27~~
[Handling requirements](#) 31
hierarchyid data type 21

I

[Implementations - Microsoft](#) 36
[Implementer - security considerations](#) 31

[Informative references](#) 10

[Introduction](#) 7~~18~~

L

[LINO Expression Tree Serialization Format Protocol](#)

[_about](#) 17

M

[manageability](#) ~~15~~

[_architecture](#) 15

[CEP Engine](#) 17~~15~~

[_web service](#) 17~~protocols~~ 19

[Manageability](#) use case ~~27~~

[_overview](#) 30

[manageability;Database Engine](#) 17

[Master Data Hub](#) 13~~11~~

[Master Data Services web service](#) ~~17~~

[_protocol summary](#) 19

[Master Data Services web service](#) 15

[_protocol summary](#) 19

[MDS](#)

[_about](#) 13~~11~~

[_management example](#) 33~~29~~

[_obtaining data](#) 35~~31~~

[_protocols](#) (section 2.1.2 13~~11~~, [_section 2](#), [_section 2.2.2](#) 19~~17~~)

[_use cases](#) 26~~23~~

[MDX queries](#) 28~~25~~

[Microsoft implementations](#) 36

[mobile report management](#)

[_native report portal](#) 27

[mobile reports](#)

[_native report portal](#) 27

N

[Native Web Services](#) ~~Protocol~~

[_client connection use case](#) 21

[_protocol summary](#) 18

[network connectivity](#) 18~~15~~

[_example](#) 34~~30~~

[_protocols](#) (section 2.1.1 12~~10~~, [_section 2](#), [_section 2.2.1](#) 18~~15~~)

[_use cases](#) 23

~~20~~

O

[obtaining data](#) 34~~30~~

[ODBC connection string structure](#) 18

[_network connectivity](#) 12~~10~~

[_protocol summary](#) 18~~15~~

[OLEDB connection string structure](#) (section 2.1.1 12~~10~~, [_section 2](#), [_section 2.2.1](#) 18~~15~~)

[_network connectivity](#) 12~~10~~

[_protocol summary](#) 18~~15~~

P

[Overview](#)

[_summary of protocols](#) 18~~15~~

[_synopsis](#) 12

P

protocols

- Analysis Services (section 2.1.4 1513, section 2.2.4 2018)
 - application development (section 2.1.1 1210, section 2.2.1 1815)
 - CEP Engine 2119
 - Database Engine (section 2.1.5 1614, section 2.2.5 2118)
 - errors 3127
 - ~~manageability (section 2.1.7 15, section 2.2.7 19)~~
- MDS (section 2.1.2 1311, section 2.2.2 1917)
 - network connectivity (section 2.1.1 1210, section 2.2.1 1815)
 - Reporting Services (section 2.1.3 1412, section 2.2.3 1917)
 - security 3127
 - used by SQL Server 7

6 **Q**

queries

- CEP Engine Manageability Protocol 3026
- MDS 2623
- querying MDS Store 2623
- sending to analysis server 2825
- SQL queries 29

26 **R**

References 10

Remote GDI+ format

- Report Viewer control 1412
- Reporting Services protocols 1917
- use cases (section 2.4.3.1 2623, section 2.4.3.3 272-24)

Report Definition Language (RDL)

- Report Server web service payload 1412
- Reporting Services protocols 1917
- use cases (section 2.4.3.1 2623, section 2.4.3.3 272-24)

Report Definition Language file format

- protocol summary 19

Report Page Layout (RPL) format

- Report Viewer control 1412
- Reporting Services protocols 1917
- use cases (section 2.4.3.1 2623, section 2.4.3.3 272-24)

Report Server web services

- Reporting Services architecture 1412
- Reporting Services protocols 1917

Report Viewer control 1412

ReportExecution2005 API

- Reporting Services architecture 1412
- Reporting Services protocols 1917
- use cases (section 2.4.3.1 2623, section 2.4.3.3 272-24)

Reporting Services

- architecture 1412
- management example 3329
- obtaining data 3430
- use cases 26

Reporting Services REST API

- protocol summary 1917

- use cases 2723

ReportService2005 API 1917

ReportService2010-API

- use cases 27

ReportService2010 API

- Reporting Services architecture 1412

- Reporting Services protocols 1917
- use cases (section 2.4.3.1 2623, section 2.4.3.3 272-24)

ReportServiceAuthentication API

- Reporting Services architecture 1412
- Reporting Services protocols 19

[Requirements](#)
[_coherency](#) 31
[_error handling](#) 31
[_overview](#) 12~~17~~
[RESTful API format](#)
[_use cases](#) 27

S

security 31~~27~~
[Security considerations](#) 31
Session Multiplex Protocol (SMUX) 12(~~section 2.1.1 10, section 2.2.1 15~~)
[_protocol summary](#) 18
SharePoint DataSet Diffgram structure 12~~10~~
[SharePoint Web Services Dataset DiffGram structure](#)
[_protocol summary](#) 18
SQL Native Client 16~~14~~
SQL queries 29~~26~~
SQL Server 21~~18~~
 CLR types 16~~14~~
 CRL types 21~~18~~
 error handling 31~~27~~
 protocols 7~~6~~
 technologies 7~~6~~
SQL Server Analysis Services 8.0 Protocol 20~~18~~
SQL Server Analysis Services Protocol
 about 15~~13~~
 Analysis Services protocols 20~~18~~
[SQL Server Analysis Services Tabular Protocol](#)
[_about](#) 15
[SQL Server binary XML structure](#)
[_protocol summary](#) 18
SQL Server Browser
 network connectivity 12~~10~~
 use cases (section 2.4.1.1 23~~20, section 2.4.1.2 23~~21~~~~)
SQL Server Resolution Protocol
 network connectivity 12~~10~~
 use case 23~~21~~
SQL Server Resolution Protocol (SSRP) ~~15~~
[_protocol summary](#) 18
Stewardship Portal 13
[System architecture](#) 11
[System dependencies](#) 22
[_within the system](#) 22
[System errors](#) 31
[System protocols](#) 18
[System requirements - overview](#) 12
[System use cases](#)
[_analysis services use cases](#) 28
[_cep engine use case](#) 30~~11~~
[_manageability use case](#) 30

T

[Table of protocols](#) 18
TDS protocol 18~~15~~
 application development 12~~10~~
 client connection use case 24~~21~~
 Database Engine 16~~14~~
 network connectivity 12~~10~~
 protocol summary 18~~15~~
 Reporting Services 14~~12~~
[TDS Version 4.2](#)
[_protocol summary](#) 18
Tracking changes 38

[33](#)

U

use cases

Analysis Services 28[25](#)

[analysis services use cases](#) 28

CEP Engine Manageability Protocol 30[26](#)

[cep engine use case](#) 30

Database Engine 29[25](#)

manageability [27use case](#) 30

Reporting Services 26

[23](#)

V

[Versioning](#)

[Microsoft implementations](#) 36

[overview](#) 30

viewing reports

external report portal 27[24](#)

native report portal ([section 2.4.3.1](#) 26, [section 2.4.3.2](#) 27[23](#))